

Figure 1.—Index map of the Reno-Lovelock area of northwestern Nevada showing the location of Rye Patch and the Pitt-Taylor Reservoirs



Figure 6.—Bathymetric map of Rye Patch Reservoir and the Pitt-Taylor Reservoirs

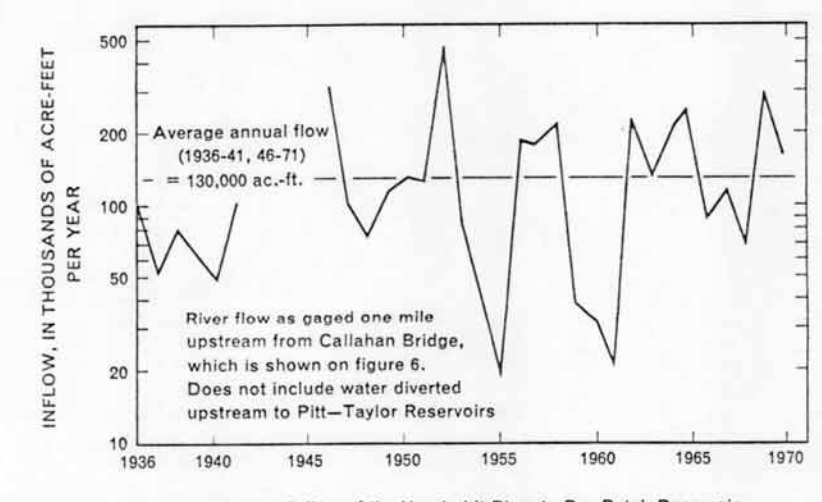


Figure 2.—Inflow of the Humboldt River to Rye Patch Reservoir

EXPLANATION

— 30 —
Lines of equal water depth, in feet; contour interval variable. Datums are reservoir surfaces at stages of 4,134 feet for Rye Patch Reservoir, 4,158 feet for Upper Pitt-Taylor Reservoir, and 4,147 feet for Lower Pitt-Taylor Reservoir. Dashed contour lines represent depth of water for 1936 conditions.

River channel center line

x 4.4
Data Point
Number is depth of water in feet

Base: U.S. Geological Survey 1:24,000 topographic series: Imlay 3 NE (preliminary draft, 1971) and Imlay 3 SE (preliminary draft, 1971); and aerial photographs 1:19,000, 1971
Cartography by Charles Bosch

BATHYMETRIC RECONNAISSANCE OF RYE PATCH RESERVOIR AND THE PITT-TAYLOR RESERVOIRS, PERSHING COUNTY, NEVADA

By
F. Eugene Rush and Bruce L. Rice
1972

118°17'30"
40°35'00"

MATCH TO NORTHERN PART OF RESERVOIR (See front)

INTRODUCTION

Rye Patch, Upper Pitt-Taylor, and Lower Pitt-Taylor Reservoirs are 110 miles northeast of Reno, Nev., and about 35 miles north of Lovelock, Nev. (fig. 1). The reservoirs are on the narrow alluvial floor of a north-trending segment of the Humboldt River Basin at an altitude of about 4,100 feet.

The principal source of water for the reservoirs is snowmelt in the mountains of north-central and northeastern Nevada. The Humboldt River Basin has an area of about 17,000 square miles, of which 95 percent is tributary to the reservoirs. The Humboldt River flows westward and southwestward across northern Nevada to the reservoir sites. Rye Patch Reservoir is an on-channel reservoir, but Upper Pitt-Taylor Reservoir receives water through a canal extending from the Humboldt River; diversion is about 12 miles upstream. Lower Pitt-Taylor Reservoir is filled from Upper Pitt-Taylor Reservoir. To drain the Pitt-Taylor Reservoirs, water is released from the upper reservoir to the lower reservoir, and then to Rye Patch Reservoir. Releases of water from Rye Patch Reservoir are used for irrigation of land near Lovelock (fig. 1), as described by Everett and Rush (1965).

Flow of the Humboldt River a few miles above Rye Patch Reservoir is measured by the Geological Survey at the station, Humboldt River near Inlay, and is summarized in figure 2. The relatively small amount of water diverted to the Pitt-Taylor Reservoirs (fig. 3) is not included in these amounts. Outflow from the reservoirs also is measured by the Geological Survey just below the dam at the station, Humboldt River near Rye Patch.

Irrigation near Lovelock began in 1862; however, full-season water supply was not available because of the erratic natural flow of the Humboldt River. In 1909, work was begun by the Humboldt-Lovelock Irrigation Light & Power Co. on construction of the Pitt-Taylor Reservoirs, named for two of the principals in the company. The design capacity of the reservoir system, to be used for power, irrigation, and domestic use, was 57,000 acre-feet. Water was first turned into the reservoirs in November 1912 when the completed capacity was 30,000 acre-feet. In 1915, levees and dams were raised to 19 feet for the upper reservoir and to 38 feet for the lower reservoir to increase storage capacity to 50,000 acre-feet. In 1935 the upper reservoir has a rated capacity of 29,000 acre-feet and the lower reservoir, 21,000 acre-feet. The reservoir system was sold to the Pershing County Water Conservation District in 1947. Figure 3 shows the diversions to the reservoirs.

Rye Patch Dam construction was begun by the U.S. Bureau of Reclamation in 1935 and was completed and water impoundment began in the following year. The dam is an earth-fill, rock-faced structure with a structural height of 75 feet, a hydraulic height of 63 feet, a crest length of 914 feet, and a volume of 356,000 cubic yards (U.S. Bur. Reclamation, 1961, p. 261-265). The design capacity is 190,000 acre-feet when 12-inch flashboards are in place on top of the spillway gates and the reservoir is full at a stage of 4,134.0 feet above mean sea level. The reservoir is used to some extent for fishing and boating, but its principal use is for storage of irrigation water.

Figure 4 shows the variation in the stage of Rye Patch Reservoir, since its construction. By comparing this graph to water-diversion data for the Pitt-Taylor Reservoirs (fig. 3), it can be seen that since about 1940, water is put into the Pitt-Taylor Reservoirs only during periods when supplemental storage for Rye Patch Reservoir is needed. There are three reasons for this: (1) Pitt-Taylor Reservoirs are less efficient than Rye Patch Reservoir for storage because of their generally lower ratio of stored-water volume to evaporation, as shown in figure 5; (2) water stored in the Pitt-Taylor Reservoirs leaches salts from the reservoir beds, reducing the quality of the stored water, whereas the quality of water stored in Rye Patch Reservoir remains better; and (3) in case of earthquake, Rye Patch Reservoir is considered by the Pershing County Water Conservation District to be a safer reservoir because of higher quality of its dam's design.

To convert staff gage readings to reservoir stage, in feet above mean sea level, the following factors should be added to the staff gage readings: Upper Pitt-Taylor Reservoir, 4,098.0 feet and Lower Pitt-Taylor Reservoir, 4,099.6 feet. These factors are based on the assumption that the stage values, in feet above mean sea level, for Rye Patch Reservoir are essentially correct. These relations were determined during this study by running levels between reservoir water surfaces. Prior to this survey, slightly different factors for the Pitt-Taylor Reservoirs were used by the reservoir operators.

The quality of water released from Rye Patch Reservoir is summarized in table 1.


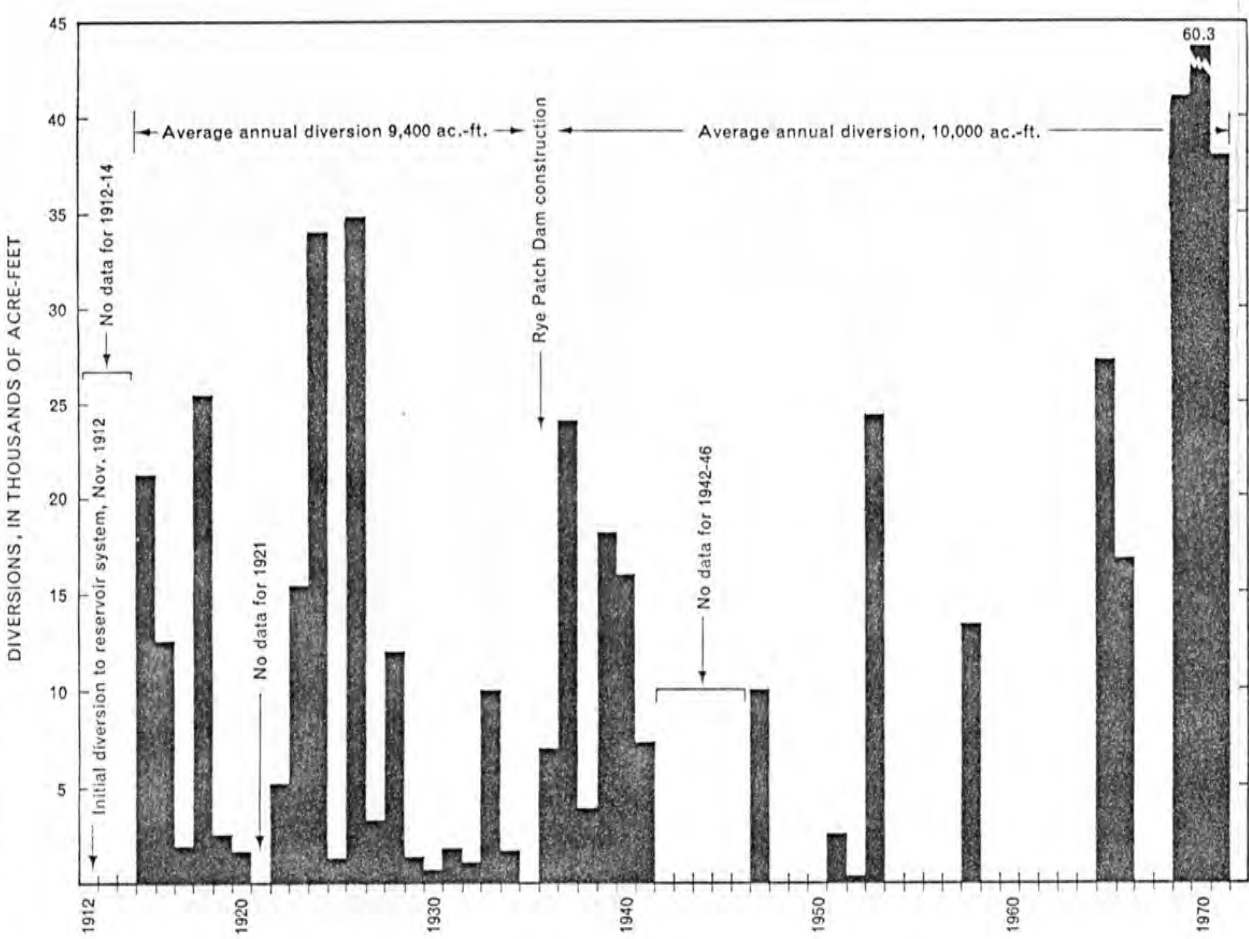


Figure 3.—Annual diversions of water from the Humboldt River to the Pitt-Taylor Reservoirs

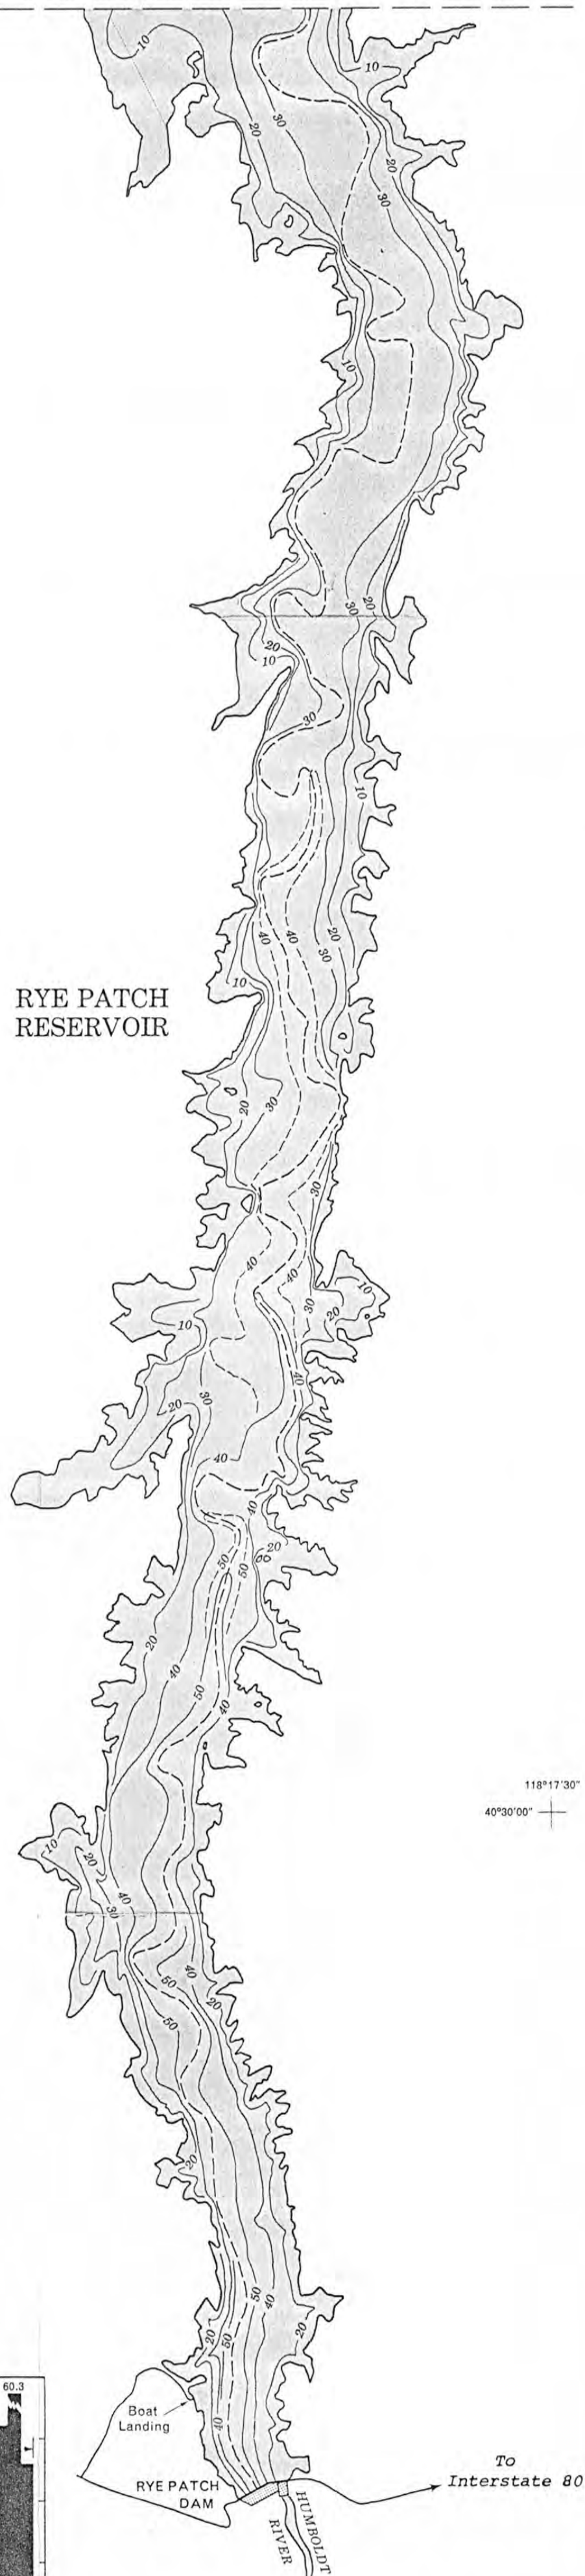

Other bathymetric surveys have been completed or are planned, as follows:

Lake or Reservoir	Publication
Pyramid Lake	USGS HA-379
Walker Lake	USGS HA-415
	Nev. DWR
Lahontan Reservoir	Info. Ser. 9
Big and Little Washoe Lakes	Info. Ser. 10
Big and Little Soda Lakes	Info. Ser. 11
Topaz Lake	Info. Ser. 12
Rye Patch Reservoir and Upper and Lower Pitt-Taylor Reservoirs	Info. Ser. 13
Marlette and Spooner Lakes	Info. Ser. 14
Weber Reservoir	Info. Ser. 15
Wildhorse Reservoir	Info. Ser. 16

Table 1.—Summary of water-quality data for Rye Patch Reservoir [At gaging station 1,000 feet below Rye Patch Dam]

Constituent	Concentration range (in milligrams per liter unless otherwise specified)
Water year 1970 (9 samples)	
Discharge when sample collected	13-694 cfs
Temperature	36-71°F
Silica	33-36
Calcium	38-45
Magnesium	15-16
Sodium	125-135
Potassium	16-18
Bicarbonate	296-312
Carbonate	0-8
Sulfate	72-87
Chloride	86-106
Fluoride	0.8-1.1
Nitrate	0.0-0.2
Boron	260-580 µg/l
Dissolved solids	562-604
Hardness	161-174
Specific conductance	893-950 micromhos
pH	7.7-8.5
Total phosphorus (as PO ₄)	0.27-0.65
Aldrin, DDD, DDT, dieldrin, endrin, heptachlor, heptachlor epoxide, lindane, 2,4-D, 2,4,5-T, chlordane	0.00 µg/l
Silvex	0.01-0.06 µg/l
Period of record	
Specific conductance, (1951-58, 1959-61, 1962-69):	
Maximum daily	4,010 micromhos on Sept. 2, 1954
Minimum daily	384 micromhos on June 24, 1956
Water temperature:	
Maximum (1951-54, 1956-58, 1959-61, 1962-68)	78°F (25.5°C) on Sept. 21, 1958
Minimum (1951-54, 1956-58, 1959-61, 1962-67, 1968-69)	33°F (0.5°C) on many winter days

BATHYMETRY

A continuously recording, electronic fathometer was used to measure water depth on the 43 traverses of Rye Patch Reservoir, 21 traverses of Upper Pitt-Taylor Reservoir, and 16 traverses of Lower Pitt-Taylor Reservoir, in June 1971. The results of the surveys are summarized in figures 5, 6, 7, 8, and 9. Dimensions of the reservoirs at reference stages used in figures 5, 6, 7, 8, and 9 are summarized in table 2.

Table 2.—Dimensions of the reservoirs when full

Dimension	Pitt-Taylor Reservoirs	
	Rye Patch Reservoir	Upper Lower
Stage, in feet above mean sea level	4,134	4,158 4,147
Staff gage, in feet	--	60.0 47.4
Maximum depth, in feet	61.5	17.5 26
Area, in acres	11,400	2,070 2,570
Volume, in acre-feet	171,000	24,200 22,200
Limit of drawdown, when down-system reservoir is at maximum stage:		
Stage, in feet above mean sea level	no limit	4,147 4,134
Maximum depth, in feet		6.5 13
Area, in acres		1,360 360
Volume, in acre-feet		4,800 1,600

1. Pershing County Water Conservation District and the State Engineer may consider the Pitt-Taylor Reservoirs to be full at stages other than those listed in this table.

SEDIMENTATION

The extent of sedimentation within Rye Patch Reservoir has been estimated by two methods: (1) the computed reduction in reservoir storage since the reservoir was formed, and (2) by estimating the amount of sediment fill on the reservoir bottom.

In 1936, the Bureau of Reclamation (1961, p. 261) computed that the reservoir, at a stage of 4,134 feet, had a storage capacity of 190,000 acre-feet. The results of the bathymetric survey of 1971 indicated a capacity of 171,000 acre-feet, or 19,000 acre-feet less. The difference in estimates may be the result of sedimentation, small errors in storage estimates, or both.

Comparing the bathymetric data of 1971 to an unpublished Bureau of Reclamation topographic map of the reservoir site compiled in 1934, sedimentation of from 1 to 5 feet along the axis of the reservoir is indicated. Figure 6 shows supplemental (dashed) contours that represent the configuration of the reservoir bottom in 1934 as compared to 1971 findings (the solid-line contours). The sedimentation, based on this comparison, is estimated to be on the order of 16,000 acre-feet. Sources of sediment would be the inflow of the Humboldt River and the collapse of vertical banks of the reservoir at high stage, as observed during the bathymetric study. This collapse has apparently enlarged the water-surface area of the reservoir from about 11,100 acres, when the reservoir was formed, to its 1971 area of 11,400 acres at a 4,134-foot stage.

From the two methods of estimating sedimentation within Rye Patch Reservoir, it is concluded that between 15,000 and 20,000 acre-feet of sediment has been deposited during the period 1936-71, or between about 30 and 40 million tons, assuming the unit weight of the deposits to be about 90 pounds per cubic foot. According to P. A. Glancy, hydrologist, U.S. Geological Survey (oral commun.), the 36-year sediment yield of the upstream 16,000-square-mile basin, in order to supply this amount to the reservoir from the Humboldt River, assuming a trap efficiency of nearly 100 percent, would be only about 50 to 70 tons per square mile per year. No estimates of sedimentation in the Pitt-Taylor Reservoirs have been made.

REFERENCES

- Everett, D. E., and Rush, F. E., 1965, Water-resources appraisal of Lovelock Valley, Pershing County, Nevada: Nevada Dept. Conserv. and Nat. Resources, Water-Resources Recon. Ser. Rept. 32, 40 p.
- U.S. Bureau of Reclamation, 1961, Reclamation project data: U.S. Bur. Reclamation pub., 890 p.

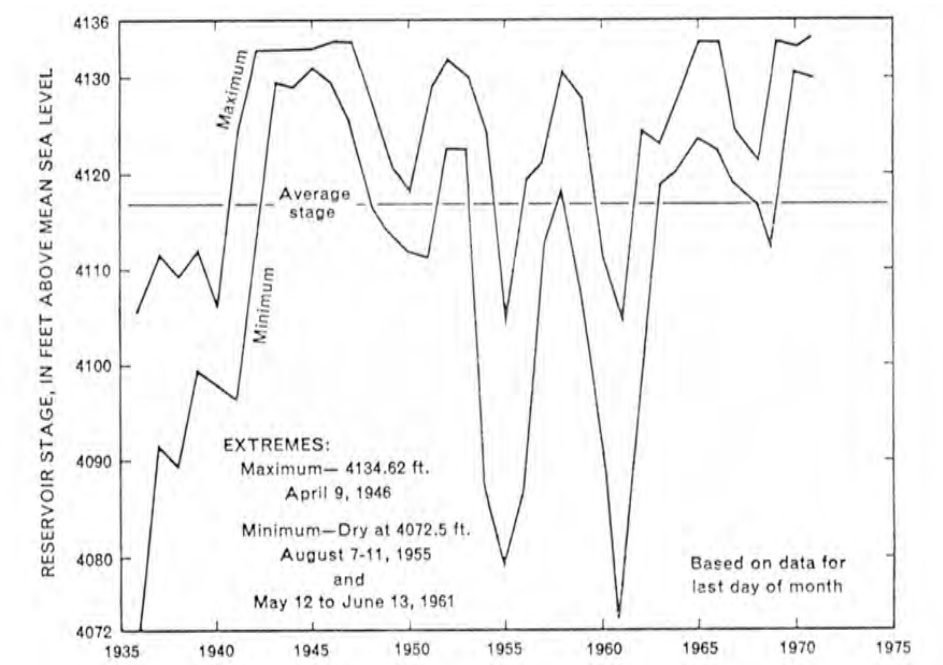


Figure 4.—Annual variation in stage of Rye Patch Reservoir

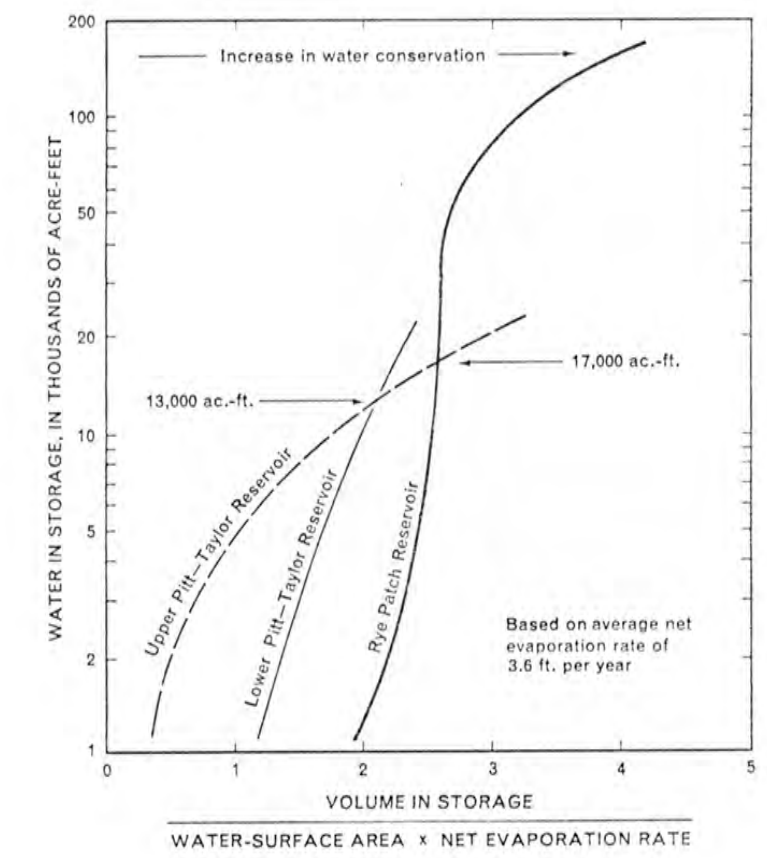


Figure 5.—Storage efficiency of the reservoirs

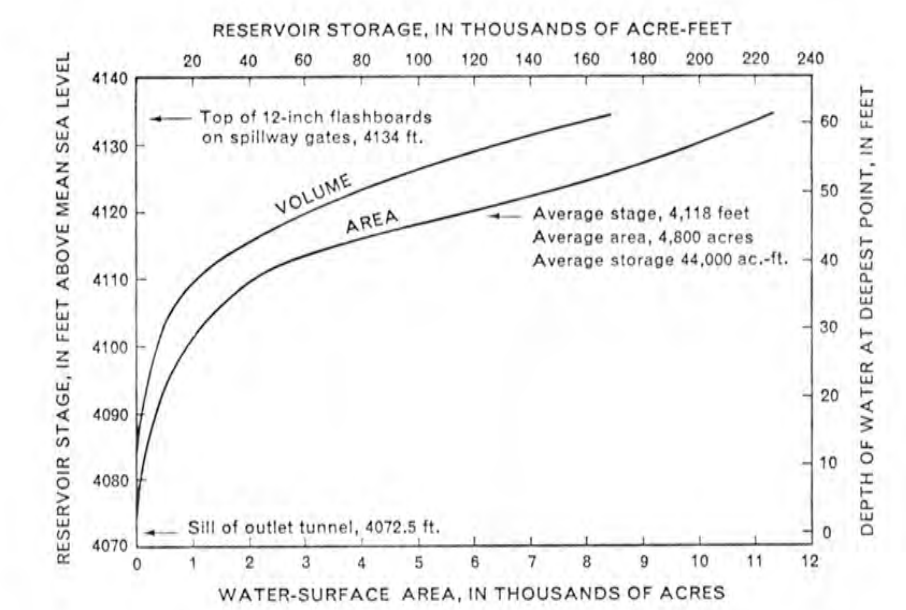


Figure 7.—Stage-area-volume relations for Rye Patch Reservoir, June 1971

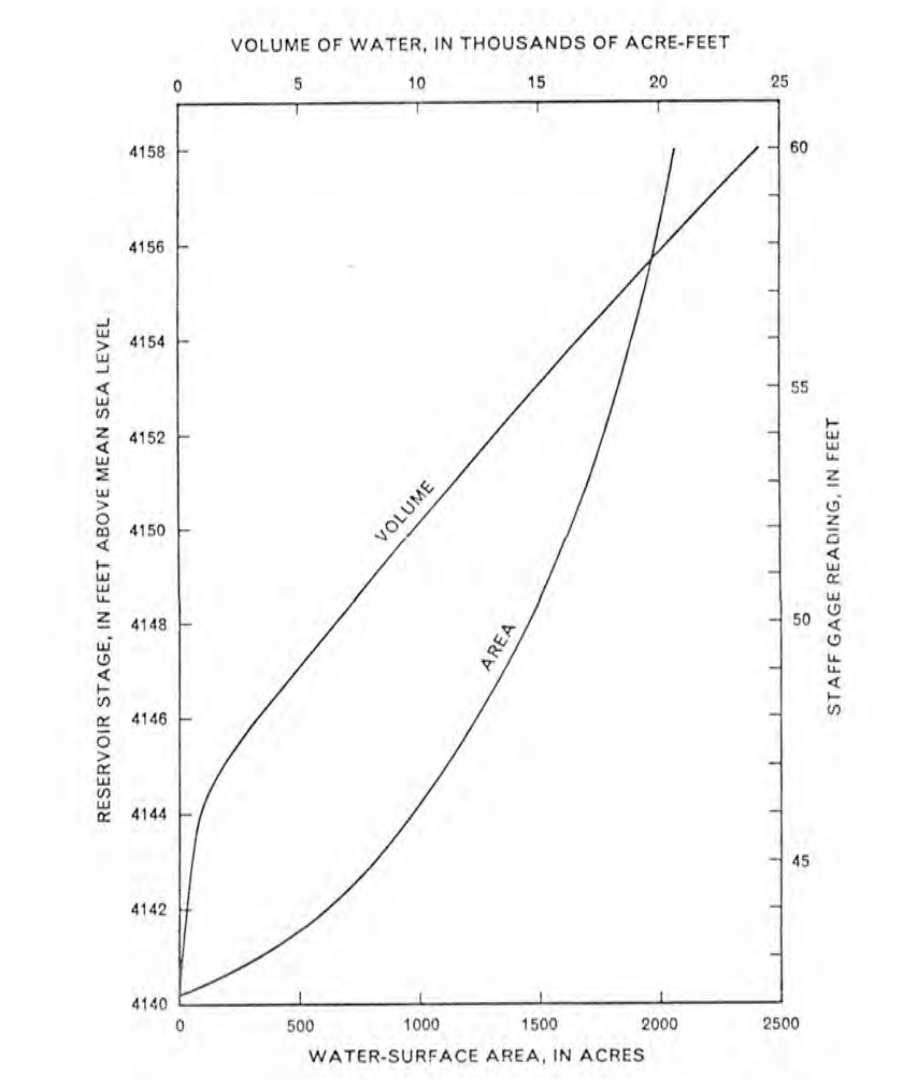


Figure 8.—Stage-area-volume relation for Upper Pitt-Taylor Reservoir

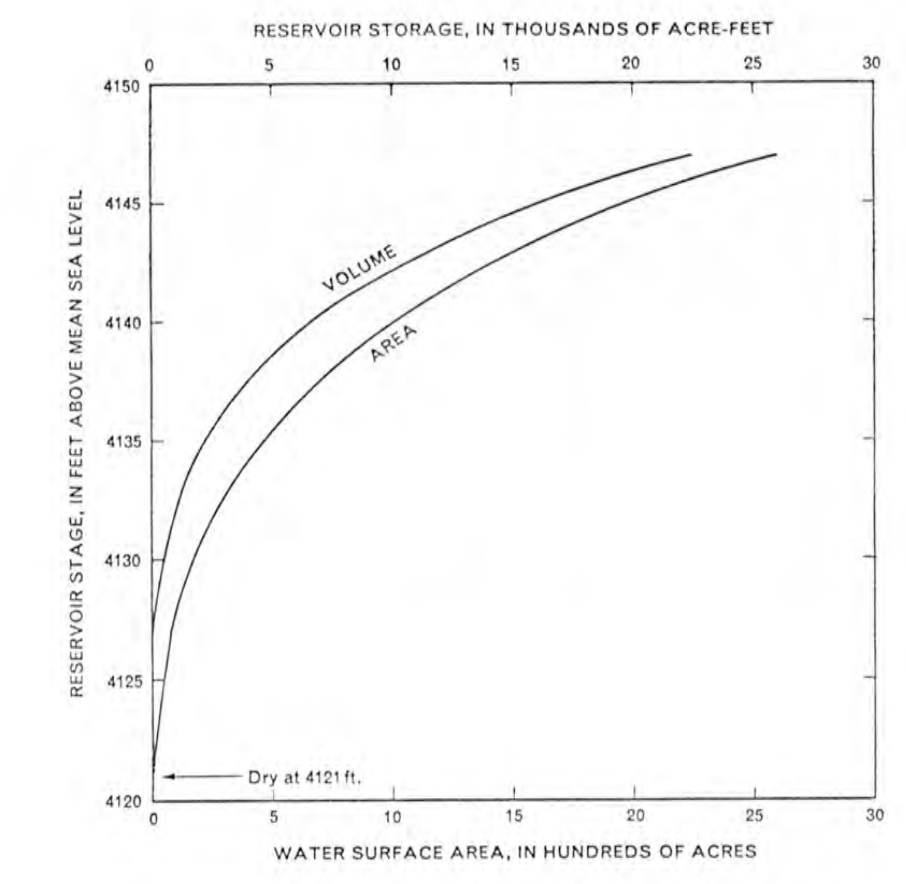


Figure 9.—Stage-area-volume relation for Lower Pitt-Taylor Reservoir