

# TRAFFIC OPERATIONS AND SAFETY STUDY PROCEDURES

TRAFFIC OPERATIONS DIVISION

Updated: November 2022



## Table of Contents

<b>Introduction.....</b>	<b>1</b>
<b>Preliminary Need Identification.....</b>	<b>1</b>
<b>NDOT Responsible Office.....</b>	<b>1</b>
<b>Kickoff Meeting and Stakeholder Coordination .....</b>	<b>2</b>
<b>Procedure .....</b>	<b>2</b>
<i>A. Study requests (not development/permit driven).....</i>	<i>2</i>
<i>B. Development/Permit Driven Studies. ....</i>	<i>2</i>
<b>Results and Recommendations.....</b>	<b>3</b>
<i>A. Study requests (not development/permit driven).....</i>	<i>3</i>
<i>B. Development/Permit Driven Studies. ....</i>	<i>3</i>
<b>Update Procedure.....</b>	<b>3</b>
<b>Responsibility .....</b>	<b>3</b>
<b>Signatures.....</b>	<b>4</b>

## Introduction

This document establishes procedures to prepare studies that meet NDOT’s requirements, identify a process including coordination with affected stakeholders, and minimize the time required to gain study acceptance. To achieve this goal, these procedures include coordination in advance to establish study scope, approach, data requirements, assumptions, and any other considerations that may affect the study’s development, validity, and acceptance.

The user is further referred to the following appendices to this memorandum for additional details applicable to specific types of studies and forms.

<b>Appendix A: Speed Zone Studies .....</b>	<b>5</b>
<b>Appendix B: Speed Feedback Signs .....</b>	<b>7</b>
<b>Appendix C: Traffic Signal Warrant Approval .....</b>	<b>9</b>
<b>Appendix D: Intersection Control Evaluations.....</b>	<b>13</b>
<b>Appendix E: Daylight Headlight Section Studies.....</b>	<b>19</b>
<b>Appendix F: Flashing Beacons .....</b>	<b>21</b>
<b>Appendix G: Pedestrian Safety Zones .....</b>	<b>23</b>
<b>Appendix H: Pedestrian Safety Improvement Evaluations .....</b>	<b>30</b>
<b>Appendix I: School Zones and School Crossing Zones Evaluations .....</b>	<b>36</b>
<b>Forms.....</b>	<b>38</b>

## Preliminary Need Identification

Requests for studies are received through various channels including:

- NDOT Staff
- Nevada State Police
- Local government entities
- The public
- Development/permit application interests

## NDOT Responsible Office

To facilitate NDOT interactions with its customers by providing the single point-of-contact most familiar with local conditions and culture, District Staff will be designated as the NDOT responsible office for the local agencies and the public. District Staff consists of the NDOT



District Traffic Engineer or Engineering Services Manager. Traffic Operations Staff will be designated as NDOT responsible office for the internal NDOT Divisions and FHWA.

### **Kickoff Meeting and Stakeholder Coordination**

At a discretion of the Chief Traffic Operations Engineer, a kickoff meeting with stakeholder representatives may be requested to review the specifics of the proposed study, including but not limited to a description of the issue(s), study limits, objectives of the study, potential issues to consider, consideration of alternative studies if applicable, and scheduling. At a minimum, stakeholders include:

- NDOT Division Heads
  - Traffic Operations Division
  - Traffic Information Division
  - Districts
  - Traffic Safety Engineering Division
  - Roadway Design/Scoping Division
  - Transportation Planning Division
  - Project Management Division (where applicable)
  - Construction Division (where applicable)
- Nevada State Police
- Local Government Agencies
  - Traffic Engineering
  - Community Development
  - Law Enforcement
  - Roadway Operations and Maintenance
  - School Districts
- Federal Highway Administration (FHWA) (if within Interstate right-of-way)

The Traffic Operations Division will address issues identified by the stakeholders in developing the scope of the study. Addressing stakeholder issues may not always include adjustments to the scope. Adjustments to the scope will be at the sole discretion of the Traffic Operations Division.

### **Procedure**

- A. **Study requests (not Development/Permit driven).** The Traffic Operations Division will prepare study requests that are not Development/Permit driven. This includes obtaining the assistance of other NDOT divisions when necessary to meet study requirements based on the engineering requirements and considerations established through the stakeholder coordination process. The study will be documented in cooperation with the District Staff and other NDOT Divisions as necessary. See corresponding Appendices for additional details on specific types of studies.
- B. **Development/Permit Driven Studies.** Applicants are responsible for contacting the NDOT District Staff to coordinate preparation of the scope of all applicable studies as outlined in this document. Applicants are responsible for preparing required studies in compliance with the scope of work approved by NDOT.

## Results and Recommendations

- A. **Study requests (not Development/Permit driven).** The Traffic Operations Division will prepare study requests that are not Development/Permit driven. Traffic Operations will document the study and findings, then contact District and the Traffic Safety Engineering Division to ensure they support the recommended treatment. When necessary, the District Staff, as the NDOT responsible office, will contact local stakeholders to further ensure support for the recommended treatment. Traffic Operations Division and the District Staff confer to reconcile raised issues and concerns through conversations. Stakeholder issues and concerns are addressed before recommendations are finalized.
- B. **Development/Permit Driven Studies.** Upon conclusion of the study and acceptance of the request by the NDOT, applicants may submit a permit application, if applicable, through the NDOT District Permit Office. The District Staff will review the application and determine if further information or a more thorough review of operating conditions is required to address the specific location or safety concerns. The applicant will be fully responsible for providing any additional documentation as determined in the review.

## Update Procedure

A process review of the Traffic Operations and Safety Study Procedures will be performed as needed. The review team will consist of the following divisions and their appointed representative:

- Traffic Operations Division
- Traffic Information Division
- Traffic Safety Engineering Division
- Road Design/Scoping Division
- Performance Analysis Section
- Transportation Planning Division
- District Staff

The process review will be conducted by the Chief Traffic Operations Engineer who is responsible for scheduling, setting the agenda, and conducting the biennial review meeting. The process review will assess the effectiveness of the procedures contained within this process.

As policies and procedures change, NDOT reserves the right to update this document as necessary.

## Responsibility

The Traffic Operations Division is responsible for the maintenance of this Traffic Operations and Safety Study Procedures document and establishing methods to:

1. Ensure compliance with requirements of the most current version of the MUTCD and all applicable federal, state, and local laws and regulations.
2. Issue assistance and guidance regarding NDOT actions necessary to comply with updates to the MUTCD including interpretations, experimentations, changes, and interim approvals to the MUTCD or as directed by the FHWA.

**Signatures**

Recommended:

\_\_\_\_\_  
Jenica Keller, P.E.  
Assistant Director Operations

\_\_\_\_\_  
Date

Approved:

\_\_\_\_\_  
Kristina Swallow, P.E.  
Director

\_\_\_\_\_  
Date

Comments:





## Appendix A: Speed Zone Studies

### Purpose

This appendix provides additional details to the traffic operations and safety study procedures for developing speed zone studies. The speed zone study is a common traffic investigation requested by the public and local governments. Its recommendations may have a direct impact on the existing posted speed limit signs. The posted speed limit sign is often a very sensitive issue for local officials and public. A consistent approach to the investigation is imperative.

### Background

1. Establishing a speed zone shall comply with the Manual on Uniform Traffic Control Devices (MUTCD, 2009 Edition), Section 2B.13, that states, in part:
  - A. "When a speed limit within a speed zone is posted, it should be within 5 mph of the 85th-percentile speed of free-flowing traffic."
  - B. It also identifies factors that may be considered when establishing speed limits:
    - a. Road characteristics, shoulder condition, grade, alignment, and sight distance;
    - b. Pace;
    - c. Roadside development and environment;
    - d. Parking practices and pedestrian activity; and
    - e. Reported crash experience for at least a 12-month period.
2. The objective of speed zoning to reflect the desired operating/target speed is to encourage uniform operating speeds thereby minimizing high risk aggressive driving behaviors to include, but not limited to, tailgating and excessive passing maneuvers.
3. When reducing posted speed limits are warranted, refer to the most current NDOT Speed Management Guidelines for countermeasure strategies.

### Process

1. Upon receipt of development of a speed zone study request, Traffic Operations Division will submit a request to the Traffic Information Division to collect and analyze speed data. Collaboration from the two divisions will determine the study parameters including:
  - A. Identify study limit section
  - B. Study segments (sub-divisions of the section) based on the length and similar roadway characteristics of the section
  - C. Data collection scheduling to account for
    - a. seasonal variations in traffic volumes
    - b. stabilization of traffic trends following operational disruptions (e.g., constructions, speed zone changes)
    - c. other temporal data-skewing operational anomalies (e.g., snow/ice, major traffic events, school sessions, holidays)
2. The Traffic Information Division collects roadway and speed data in the field and acquires collision data from the Traffic Safety Engineering Division. Data collection as needed:
  - A. Ball-bank testing of curves for advance warning sign.
  - B. Determination of no passing zones.
3. Traffic Information Division uses an appropriate speed data analysis tool (currently USLIMITS, an FHWA software program) to analyze the data and develop a speed study report including recommended speed limits generated by the software, if applicable, and curve advisory speed signing as determined in the field.

4. Traffic Safety Engineering and Traffic Operations Divisions review collision data to identify safety issues requiring treatment in conjunction with establishing a speed zone. Posting a regulatory speed limit lower than the recorded 85<sup>th</sup> percentile operating speed without any mitigation measures is not an effective treatment for speed-related safety issues and is discouraged. Speed advisory plaques with appropriate warning signage for unexpected roadway characteristics are more effective in inducing speed reductions.
5. Traffic Operations Division reviews the report and contact the requesting District Staff, and Traffic Safety Engineering Division, to ensure support for the recommended speed zone. The District Staff, as the responsible office, contacts Nevada State Police and/or local law enforcement agency, and local roadway stakeholders to further ensure support for the recommended speed zone. Traffic Operations Division, Traffic Safety Engineering Division, and the District Staff confer to reconcile issues or concerns raised in the conversations. Stakeholder concerns are addressed before recommendations are finalized.
6. If no changes to existing speed zones are recommended, Traffic Operations Division sends a memo to the District to close the file.
7. If modifications to existing speed zones are recommended, Traffic Operations Division will need to obtain concurrent from Traffic Safety Engineering Chief and the District Engineer in an email form for documentation purposes.
8. For the recommendations to increase the speed limits, there will be a memo to the Roadway Design Chief, requesting a geometric review of the roadway segments to validate and concur the speed limits increase.
9. For the recommendations to increase the speed limits, Traffic Operations Division will request a passing sight distance study after the new speed limit signs is implemented to ensure the existing passing zone is appropriate for the new posted speed limits.
10. Typically, this process takes approximately three to four months from the time of receiving the request to a recommendation. It could be longer if speed modification requires the NDOT Director's approval.

### **NDOT Approval**

1. If the recommendation is to modify an existing speed zone, Traffic Operations Division will prepare speed zone authorization documents and secure the Director's approval.
2. For a recommendation to increase the existing speed zones, the approval memo should include, when applicable.
  - A. The new passing zones.
  - B. Curve warning signs.
  - C. Advisory speed plaques.
3. For a recommendation to reduce the existing speed zones, the approval memo should include the countermeasure strategies on how to achieve desired operating speed, and any additional mitigations to reduce vehicle speed.

### **Implementation**

Upon Director approval, the District Staff will initiate the appropriate work orders to post authorized speed zone signs, and implement recommended no passing zones, curve warning signs and advisory speed plaques as needed.



## Appendix B: Speed Feedback Signs

### Purpose

This appendix provides additional details to the traffic operations and safety study procedures for installation of speed feedback signs. The purpose of speed feedback signs is to slow cars down by displaying the driver's speed compared to the posted limits. A consistent approach to the investigation is imperative.

### Background

1. The typical purpose of a speed feedback sign is to encourage compliance with posted speed limits. Prior to installing speed feedback signs as a speed reduction strategy, the investigation needs to consider if other passive measures (e.g., warning signs with advisory speed plaques) have proven ineffective to reduce excessive speeds.
2. Installation of a speed feedback sign shall comply with MUTCD (2009 Edition) Section 2B.13, "Speed Limit Sign (R2-1)", that states, in part:
  - A. A (speed feedback sign is a) changeable message sign that displays to approaching drivers the speed at which they are traveling may be installed in conjunction with a speed limit sign.
  - B. If a changeable message sign displaying approach speeds is installed, the legend YOUR SPEED XX MPH or such similar legend should be displayed. The color of the changeable message legend should be a yellow legend on a black background or the reverse of these colors.

### Process

1. Upon receipt of a request for installation of a speed feedback sign, Traffic Operations Division will initiate a speed study as described in Appendix A. A speed study will need to be completed before a speed feedback sign study can be evaluated.
2. Traffic Safety Engineering and Traffic Operations Divisions will review speed, roadway characteristic, and collision data to identify safety issues and to develop recommendation. If the recorded 85<sup>th</sup> percentile speed is more than the posted speed limit and the review has determined excessive speed is the primary contribution factor for safety issues, these passive treatments may be considered.
  - A. First, the installation of warning signs with accompanied advisory speed plaques may prove effective. Warning signage for unexpected roadway characteristics (e.g., roadway curvature; inadequate visibility of roadside development (driveways), crosswalks, or intersections) may require speed reductions to provide adequate stopping sight distance. Adding advisory speed plaques may be effective in inducing appropriate driver response.
  - B. Second, the installation of flashing beacons may better command the driver's attention to the existing unexpected roadway characteristic (warning sign/advisory speed plaque) or safety issue.
  - C. If installation of passive measures does not provide desired results within six months of operation, a speed feedback pilot deployment may be considered. This consists of placing a portable speed feedback sign where the effectiveness in providing the desired results shall be quantified and documented after a period of no less than six months in operation. If the pilot deployment does not provide the desired results (performance measures and/or targets), then it will be removed from the site and other treatments will be considered.

3. Typically, this process takes approximately three to four months from the time of receiving the request to a recommendation.

### **NDOT Approval**

1. Upon conclusion of the speed feedback sign study, a memo will be prepared, detailing the recommended speed feedback sign installations for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., permit application, request for environmental review/clearance).
2. The memo will include three follow-up studies. These three required after studies occurring at 6 months, one year, and 2-year schedule will measure its effectiveness.
3. The approval may be subject to executing a maintenance agreement with NDOT District, and a local agency if NDOT District doesn't have the staff to maintain the system.
4. NDOT's speed feedback sign approval does not include environmental clearance or right-of-way verification for the sign deployment. Further coordination from the responsible party is needed to receive environmental and right-of-way clearances.
5. NDOT speed feedback sign approval does not obligate NDOT to construct the requested speed feedback sign.

### **Implementation**

1. For Development/Permit driven requests, the applicant will be responsible for the speed feedback sign installation per the conditions of an approved permit. Additionally, if the speed feedback sign is not constructed within one year of the date of NDOT approval, all information will be reviewed based on current conditions and may result in denial of the speed feedback sign installation.
2. For other requests, the District Staff may initiate the appropriate work orders for speed feedback sign installation.
3. If the speed feedback sign installation does not provide the desired results (performance measures and/or targets), Traffic Operations Division may initiate the removal memo. The removal memo should document its reasonings, who is responsible for the removal, and course(s) of action in lieu of the removal.

## Appendix C: Traffic Signal Warrant Approval

### Purpose

This Appendix provides additional details to the traffic operations and safety study procedures for performing traffic signal warrant studies. The purpose of the traffic signal warrant study is to ensure signal warrant analysis meet NDOT requirements, optimize efforts of the consulting engineering community, and minimize the time required to gain acceptance of the study. This process includes advance coordination with NDOT to document study scope, approach, data requirements, assumptions, and any other considerations that may affect the development, validity, and acceptance of the study. A consistent approach to the investigation is imperative.

### Background

This study process replaces the Traffic Operations Policy Memorandum 2015-01, executed on July 15, 2015, in its entirety.

### Process

1. Upon receipt of a request for a traffic signal warrant study that is not Development/Permit driven, the Traffic Operations Division, as the responsible office, will develop a study plan. Technical assistance in development or execution of the study plan may be requested, as needed, from Traffic Safety Engineering Division, Traffic Information Division, or other stakeholders.
2. Signal warrant studies shall conform to requirements of the current version of the Manual on Uniform Traffic Control Devices (MUTCD) and the approved methodology. Satisfying one or more of the MUTCD signal warrants is prerequisite for continuing engineering analysis and review of the appropriateness of a traffic signal for a specific location; however, meeting a signal warrant will not in itself justify such an installation. Any resulting authorization related to installation of a traffic signal or other improvements will be at the sole discretion of NDOT.
  - A. All traffic signal warrant studies on NDOT owned and maintained streets and highways shall apply 25% of the right turn volumes from the minor leg to the left and/or through side street volumes for warrant analysis purposes.
3. For requests that are Development/Permit driven, the requesting party will coordinate development of the study plan with the NDOT District Permit Staff and prepare a memorandum outlining the methodology for NDOT approval and signature.
  - A. Provide brief information about the project purpose, describe the general study area and list planned improvements or additions.
  - B. Provide a description of existing conditions with illustrations or exhibits as necessary depicting geometry, grades, sight distance, existing speed limits and signage.
  - C. Describe both the existing and proposed corridor operations in terms of measures of effectiveness, signal coordination, conflicting accesses, safety considerations, and alternatives analysis.
  - D. Identify warrant(s) that will be used in the analysis of the subject location and provide justification for application of those warrants.
    - a. At the discretion of the NDOT Traffic Operations, the California MUTCD 2014 "Average Traffic Estimate Form" may be used to project the need for future signals at new intersections or at other locations where it is not feasible to count traffic volumes. See Figure 4C-103 (CA) attached. This form shall be used only

to indicate a future need and will not qualify as a substitute for application of warrant criteria.


- E. Identify potential conflicts with NDOT's Access Management System and Standards and propose alternatives to mitigate the conflicts.
  - F. Identify alternative solutions to be considered and analyzed in lieu of a signal installation. An intersection control evaluation (ICE) per requirements of Appendix D may be required.
  - G. Identify traffic analysis tools and manuals. Only current versions/editions of tools and manual will be acceptable.
  - H. Indicate the data sources, counting methodologies (weekdays, hours, intervals, etc.), and MOE calculation / validation / calibration methodologies (speeds, delay, queue length, etc.) that will be used in the study.
  - I. Describe any additional features, characteristics, and concerns that may have an impact on the project (R/W and physical limitations, ADA compliance, adjacent developments, environmental concerns, public involvement, etc.).
  - J. Any unique considerations that may need to be discussed and/or approved by NDOT to demonstrate the applicability and effectiveness of a treatment alternative more clearly.
4. The requesting party will develop the study according to the approved methodology and submit a report of findings. The NDOT District Permit Staff in cooperation with NDOT stakeholders shall be responsible for reviewing and approving the study methodology, data collected or proposed for application in the study, and the resulting study report for any location subject to NDOT jurisdiction.
  5. The following flowchart details the traffic signal warrant analysis process.
  6. Typically, this process takes approximately three to four months from the time of receiving the request to a recommendation.

## **NDOT Approval**

1. Upon conclusion of the traffic signal warrant study, a memo will be prepared, detailing the recommended traffic signal installations for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., perform an ICE, permit application, request for environmental review/clearance).
2. The requesting party is responsible for obtaining an NDOT permit within one year of installation approval letter date.
3. The signal installation must be completed within two years of the date of the installation approval letter.
4. If the permit is not obtained within one year of the installation approval letter date or the signal is not constructed within two years, the responsible party will be responsible for updating the study.
5. A study update will require an NDOT review for reaffirmation of the analysis results. All information will be reviewed based on current requirements and may result in a withdrawal of a previous approval.
6. Condition changes associated with the study may constitute a need for a study update at the discretion of NDOT. NDOT may suspend a previous approval pending findings of a study update.
7. Approval by NDOT does not constitute environmental clearance or right-of-way verification for the recommended alternative.
8. Approval by NDOT does not obligate NDOT to construct the recommended alternative.

## Implementation

1. For Development/Permit driven requests, the applicant will be responsible for the ICE suggested alternative installation per the conditions of an approved permit. Additionally, if the suggested alternative is not constructed within two years of the date of NDOT approval, all information will be reviewed based on current conditions and may result in denial of the ICE suggested alternative installation.
2. Implementation may be accomplished in a variety of ways, NDOT upcoming projects (e.g., 3R, standalone, and/or safety) pending on funding availability, County improvement projects, or development driven projects.

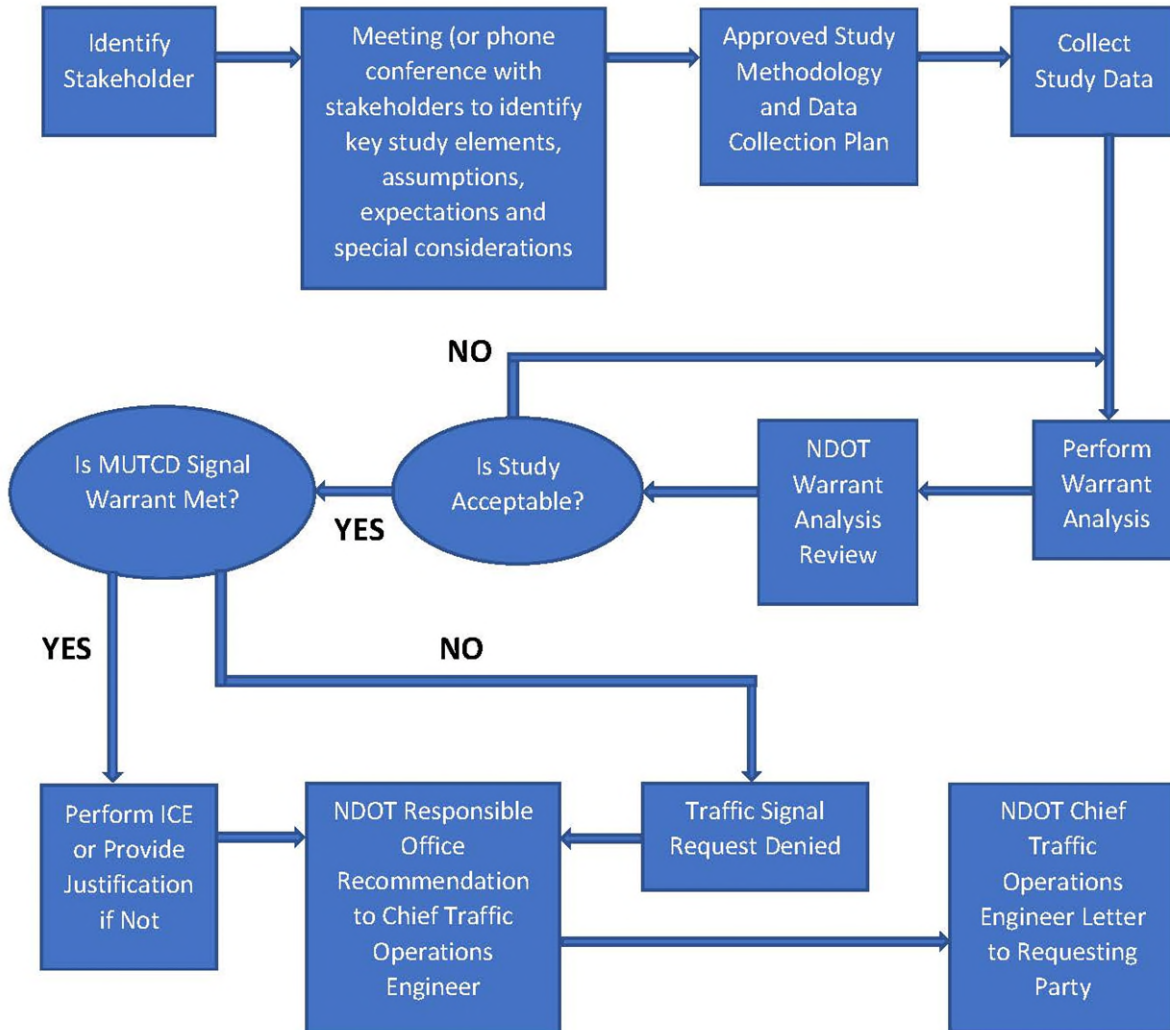



**Figure 4C-103 (CA). Traffic Signal Warrants Worksheet  
 (Average Traffic Estimate Form)**

COUNT DATE \_\_\_\_\_  
 CALC \_\_\_\_\_ DATE \_\_\_\_\_  
 CHK \_\_\_\_\_ DATE \_\_\_\_\_

DIST \_\_\_\_\_ CO \_\_\_\_\_ RTE \_\_\_\_\_ PM \_\_\_\_\_

Major St: \_\_\_\_\_ Critical Approach Speed \_\_\_\_\_ mph  
 Minor St: \_\_\_\_\_ Critical Approach Speed \_\_\_\_\_ mph

Speed limit or critical speed on major street traffic > 40 mph.....  }  
 or  } **RURAL (R)**  
 In built up area of isolated community of < 10,000 population.....  }  
 } **URBAN (U)**

**(Based on Estimated Average Daily Traffic - See Note)**

URBAN.....		RURAL.....		Minimum Requirements EADT			
<b>CONDITION A - Minimum Vehicular Volume</b>				Vehicles Per Day on Major Street (Total of Both Approaches)		Vehicles Per Day on Higher-Volume Minor Street Approach (One Direction Only)	
Satisfied _____ Not Satisfied _____							
Number of lanes for moving traffic on each approach				Urban	Rural	Urban	Rural
Major Street	Minor Street	Major Street	Minor Street				
1.....	1.....	1.....	1.....	8,000	5,600	2,400	1,680
2 or More.....	1.....	2 or More.....	1.....	9,600	6,720	2,400	1,680
2 or More.....	2 or More.....	2 or More.....	2 or More.....	9,600	6,720	3,200	2,240
1.....	2 or More.....	1.....	2 or More.....	8,000	5,600	3,200	2,240
<b>CONDITION B - Interruption of Continuous Traffic</b>				Vehicles Per Day on Major Street (Total of Both Approaches)		Vehicles Per Day on Higher-Volume Minor Street Approach (One Direction Only)	
Satisfied _____ Not Satisfied _____							
Number of lanes for moving traffic on each approach				Urban	Rural	Urban	Rural
Major Street	Minor Street	Major Street	Minor Street				
1.....	1.....	1.....	1.....	12,000	8,400	1,200	850
2 or More.....	1.....	2 or More.....	1.....	14,400	10,080	1,200	850
2 or More.....	2 or More.....	2 or More.....	2 or More.....	14,400	10,080	1,600	1,120
1.....	2 or More.....	1.....	2 or More.....	12,000	8,400	1,600	1,120
<b>Combination of CONDITIONS A + B</b>				2 CONDITIONS 80%		2 CONDITIONS 80%	
Satisfied _____ Not Satisfied _____							
No one condition satisfied, but following conditions fulfilled 80% or more.....							
A		B					

**Note: To be used only for NEW INTERSECTIONS or other locations where it is not reasonable to count actual traffic volumes.**

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.



## Appendix D: Intersection Control Evaluations

### Purpose

This Appendix provides additional details to the traffic operations and safety study procedures for performing intersection control evaluations (ICE). The purpose of an ICE is to select the optimal control type for an intersection based on an objective analysis of the existing conditions and for future needs. The report also provides documentation of all the technical and economic analyses that went into determining a suggested alternative. The ICE process considers options on an equal basis. A consistent approach to the investigation is imperative.

### Background

Engineers have an increasing number of options for intersection traffic control type. Previously, the only solution to traffic delay and safety problems for at grade intersections was the installation of a traffic signal. Currently, other options including roundabouts, reduced access intersections, and higher capacity intersections are acceptable alternatives. Per MUTCD guidelines, an engineering study shall be performed to determine whether a traffic signal is justified before a new signal or significant modification of a signal can proceed. The traffic signal warrant analysis is straight-forward but does not consider other alternatives that include, but are not limited to: All-Way Stop Control, roundabouts, access management, channelization, movement restrictions, grade separation and non-traditional designs (i.e., continuous flow intersection, median U-turn, superstreet, etc.). Performing an ICE provides the opportunity to consider these other alternatives.

### Process

1. Upon receipt of an ICE request, the Traffic Operations Division, as the responsible office, will develop a study plan. Technical assistance in development or execution of the study plan may be requested, as needed, from the Roadway Scoping Section, Traffic Safety Engineering Division, Traffic Information Division, or other stakeholders.
2. The requestor shall provide a "Statement of Need" that presents facts and evidence to support the proposed evaluation. Conduct a preliminary field review, as necessary, to obtain an understanding of how the intersection functions, determine the nature and extent of the problems that are occurring.
  - A. Based on the Statement of Need, the Chief Traffic Operations Engineer determines if an ICE is required. The Traffic Operations Division shall distribute the notification to stakeholders.
  - B. A traffic signal warrant study following the process detailed in Appendix C shall be prepared. Upon completion of the traffic signal warrant study, an initial determination if an ICE is required shall be made for intersections on or connecting to the state roadway system.
3. All intersection treatments must be considered as early in the project development process as feasible. This could occur during planning or corridor studies but no later than the scoping portion of an improvement project. A corridor analysis may be necessary for some projects. This depends on the location of the intersection in relation to adjacent intersections and the respective intersection control of each.
4. An internal needs assessment and kick-off meeting, lead by Traffic Operations Division, will be held with Roadway Scoping Section and Traffic Safety Engineering Division, and District staff to discuss the ICE scope, intersection needs, evaluation timeline, local

issues, schedule, goals, milestones, and other key information needed. Gather the following background information and cost data needed for the analysis:

- A. Alternative's data
  - B. Traffic data (may include some or all of the following)
    - a. Existing peak hour turning movement volumes
    - b. Design year peak hour turning movement volumes for no-build and all alternatives
    - c. Existing Average Daily Traffic (ADT)
    - d. Design year ADT
    - e. Heavy truck percentage
    - f. Pedestrian counts
    - g. Bicycle counts
  - C. Safety
    - a. Crash data (5 years for both urban and rural locations)
    - b. Societal cost of crashes
  - D. Additional Data
    - a. As-builts from NDOT. If as-builts are not available, conduct field review of surface utilities to determine potential utility conflicts
    - b. Aerial photography, mapping, and topography files from NDOT
  - E. Standardized cost data for each district shall be used to ensure consistency and concurrence. Cost data for items not listed shall be based on engineering judgement and submitted to the Traffic Operations Division for distribution to NDOT price checkers. The Traffic Operations Division will initiate annual review and update of cost data.
    - a. Cost/vehicle-hour delay
    - b. Annual maintenance cost for a signal
    - c. Estimated annual roundabout landscaping cost
    - d. Estimated annual landscaping cost
    - e. Signal retiming costs and frequency
    - f. Annual power cost for traffic signals
    - g. Annual power and maintenance cost for lighting per intersection per luminaire
    - h. Pavement maintenance cost/resurfacing cost per square yard (assume 20 years)
    - i. Right-of-way cost
5. Traffic operations, safety, cost, life-cycle cost, feasibility, and benefit-cost analyses shall be performed, as required.
- A. Perform traffic operations analysis for each alternative utilizing the latest version of Synchro, Sidra, and/or Vissim software. Synchro analysis will use Highway Capacity Manual (HCM) methodologies for stop-controlled and signalized intersections. Roundabouts will be analyzed in Sidra using HCM methodologies. Synchro default inputs will be used unless otherwise noted by the Traffic Operations Division, other analysis software will have their defaults modified to match Synchro default, or other values as provided by the Traffic Operations Division. The speed limit will be the existing posted speed limit for that road. Synchro and Sidra outputs include queue length (95th percentile in Synchro), delay, degree of saturation, and level of service (LOS).
    - a. Some alternate intersection types cannot be properly analyzed using Synchro or Sidra (e.g., Diverging Diamond Interchange (DDI)). These alternate intersection types will be analyzed using Vissim. Vissim output will be measured using delay and queue length. Delay and queue will be calculated using nodes. LOS will be determined from delay equivalent to the HCM methodologies. A minimum of 3 runs will be used in Vissim and the minimum Random Seed Increment is 1. The

models will not require calibration; however, with consistent use of input data, they will provide a valid comparison of results. Vissim models will be validated for proper driver compliance of intersection control and other roadway features, including all other road users. Vissim may be used for all alternatives with Traffic Operations approval.

- B. Perform Safety Analysis for each alternative and the existing condition. For new intersections, predict the number of crashes expected annually for each control option utilizing a spreadsheet tool and Safety Performance Functions (SPFs). For existing intersections utilize crash history from the previous 5 years and Crash Modification Factors (CMFs). The CMFs should be Nevada specific that were developed by Traffic Safety Division, unless approved by the project manager. Stop-controlled and signalized intersections can be estimated with SPFs from the Highway Safety Manual (HSM). For roundabouts CMFs can be used to quantify the crash frequency with a roundabout versus another control option. Safety analysis will provide the estimated frequency and severity of crashes per year for each control option.
  - C. Prepare conceptual scaled layouts of each alternative on an aerial map illustrating existing right-of-way lines. The conceptual layout is intended to serve as a preliminary graphic with the minimal amount of information necessary to perform the analysis. Complete the following items after preparation of the conceptual layouts:
    - a. Estimate right-of-way area to be acquired for each alternative, rounded up to the nearest 100 square foot
    - b. Identify access management conflicts with the design intersection and graphically depict a solution.
    - c. Determine if structures or retaining walls will be required for each conceptual alternative.
    - d. Identify potential environmentally sensitive areas such as wetlands and structures.
    - e. Prepare a preliminary opinion of probable cost including structures, rights-of-way, utility conflicts and construction. Traffic Operations Division reviews cost estimates to ensure consistency and concurrence.
    - f. Calculate the total costs of the life of the project including maintenance and vehicle related crash costs (using results from the Safety Analysis). Traffic Operations Division reviews cost estimates to ensure consistency and concurrence.
    - g. Prepare a feasibility study to analyze how successfully the alternatives can be completed, accounting for affecting factors like funding, delivery timeframe, scheduling, resources, and urgency (routine, high-priority or project related). The goal is to place emphasis on potential risks that could occur if an alternative is pursued so a determination can be made by NDOT Management if the alternative should be considered.
    - h. Calculate the Benefit-Cost ratio for each alternative using one of the models supported at <http://bca.transportationeconomics.org/models> or an approved equal. Benefit-Cost calculations shall be submitted to the Traffic Operations Division for distribution to NDOT Performance Analysis Division to ensure consistency and concurrence.
    - i. Calculate the Safety Performance Benefit-Cost.
6. Documentation
- A. Summarize the results of the ICE analysis as shown in Table 1.
  - B. Provide results that define how each alternative meet both safety and traffic operations goals. The results will be based upon feasibility, fit, performance,

- engineering judgement and not solely based on the Safety Performance Benefit-Cost ratio or the Benefit-Cost ratio.
- C. Develop a conclusion statement (not longer than 1 page) based upon the results of the evaluation. The conclusion statement will clearly state how alternatives accommodate safety and how they address traffic operations and should include information regarding feasibility, urgency (routine, high-priority, project related), design exceptions, delivery time frame, cost, and potential impacts.
  - D. Prior to the draft ICE document submittal, cost data and benefit-cost calculations shall be updated based on NDOT review. Reviewers typically include Roadway Scoping Section, District Staff, Traffic Safety Engineering Division, Constructability Division, Performance Analysis Division, and Traffic Operations Division.
  - E. Provide a list of all assumptions including preliminary opinions of probable costs for each alternative, life-cycle cost data, and any other assumptions that are made for each alternative. Provide a list and contact info for all agency personnel utilized to screen alternatives or make assumptions. Include information in the appendices of the ICE document.
  - F. Prepare a draft ICE document and submit it to the Traffic Operations Division for distribution to NDOT Divisions for comment. Traffic Operations will compile comments received noting respective reviewers. Following is an outline of the ICE Document:
    - a. Introduction stating intersection location and reasons for the ICE report and the origin of the request.
    - b. Statement of Need
    - c. ICE Summary Table
    - d. Conclusion Statement
    - e. Appendices
      - i. Input and output data from the various types of computer analysis as well as any hand calculations relevant to the analysis.
      - ii. Any information used to make the determinations of quantities and costs
      - iii. Assumptions and contact information for agency personnel responsible for assumptions
      - iv. Site plan with existing roadway
      - v. Conceptual site layout with right-of-way lines for each alternative and access management mitigation
  - G. Deliverables include a draft and final ICE document in PDF format. If needed a conference call or meeting may be conducted to review comments and address comment/resolution.
7. Typically, this process takes approximately four to five months for an ICE report.

### **NDOT Approval**

1. Upon conclusion of the study, the final ICE document shall be distributed to the Roadway Scoping Division. This Division shall perform additional evaluations, generate more representative costs, further analyze the suggested alternative, and if needed, various other alternatives, then present to the Project Development Committee (PDC). The PDC shall approve and determine the priority of implementing the suggested alternative. The NDOT responsible office will notify appropriate stakeholders.
2. Approval by NDOT does not constitute environmental clearance or right-of-way verification for the suggested alternative.
3. Approval by NDOT does not obligate NDOT to construct the suggested alternative.

## Implementation

Implementation may be accomplished in a variety of ways, NDOT upcoming projects (e.g., 3R, standalone, and/or safety) pending on funding availability, County improvement projects, or development driven projects.

Table 1: ICE Summary

Parameter	Existing Condition	Alt. 1	Alt. 2	Alt. 3
Existing Delay AM (PM) [sec/veh]	## (##)	## (##)	## (##)	## (##)
Existing LOS AM (PM)	A (B)	A (B)	A (B)	A (B)
Design Year Delay AM (PM) [sec/veh]	## (##)	## (##)	## (##)	## (##)
Design Year LOS AM (PM)	A (B)	A (B)	A (B)	A (B)
Design Year Longest Queue [feet]	##.#'	##.#'	##.#'	##.#'
Safety Analysis, crashes per year Crash Modification Factors (CMFs)	##.#	##.#	##.#	##.#
Safety Analysis, crashes per year Safety Performance Functions (SPFs)	##.#	##.#	##.#	##.#
Right of Way Area [ft <sup>2</sup> ]	## ft <sup>2</sup>	## ft <sup>2</sup>	## ft <sup>2</sup>	## ft <sup>2</sup>
Right of Way Utility Conflicts [Yes/No]	Yes	No	No	Yes
Retaining Walls/Structures [Yes/No]	No	No	Yes	Yes
Need for Environmental Evaluation [Yes/No]	No	No	Yes	Yes
Design Exceptions Required [Yes/No]	No	Yes	No	Yes
Delivery Timeframe (months) Design/Environmental/Right of Way Bid/Award/Construction		## ##	## ##	## ##
Project Cost, initial	\$ ##,###.##	\$ ##,###.##	\$ ##,###.##	\$ ##,###.##
Total Project and Life Cycle Costs	\$ ##,###.##	\$ ##,###.##	\$ ##,###.##	\$ ##,###.##
Benefit-Cost Ratio	##.##	##.##	##.##	##.##
Safety Performance Benefit-Cost Ratio	##.##	##.##	##.##	##.##



## Appendix E: Daylight Headlight Section Studies

### Purpose

This appendix provides additional details to the traffic operations and safety study procedures for performing daylight headlight section studies. The purpose of a daylight headlight study is to identify sections of a state highway with high crash rates during the daylight hours. A consistent approach to the investigation is imperative.

### Background

A daylight headlight section of a two-lane highway has shown to increase vehicle the visibility of oncoming traffic. However, implementing a daylight headlight section should only be considered after a thorough review of the daylight hour crash history and implementation of other safety measures has proven ineffective in improving daylight hour operations.

### Process

1. Upon receipt of a request for designation of a daylight headlight section on a state highway, the Traffic Operations Division, as the responsible office, will develop a study plan. Technical assistance in development or execution of the study plan may be requested as needed, from Traffic Safety Engineering Division, District Staff, or other stakeholders.
2. The following subtasks shall be considered in the development of a study methodology for each section. The subtasks are not intended to be all inclusive and may be modified or expanded by NDOT to address specific section concerns.
  - A. Provide brief information about the project purpose, describe the general study section with illustrations or exhibits as necessary and list planned improvements or additions.
  - B. Collect the available crash history of the study section from the Traffic Safety Engineering Division. At a minimum, three years of crash history should be evaluated; when possible, five years of crash history should be utilized. The crash rates should be based on one hundred million vehicles miles and reflect the available AADT.
  - C. To be considered for a daylight headlight section, the crash rates should be compared to the statewide average for the similar types of roadways. In addition to the type of crashes, the time the crashes occurred, and the geometric design of the roadway, engineering judgment should be used.
3. Traffic Operations Division will coordinate with the District Staff and Traffic Safety Engineering Division to ensure support for the recommended daylight headlight section.
4. The District Staff will contact the responsible law enforcement agencies to verify if they have the staff and resources to enforce the new signing regulations.
5. Traffic Operations Division will prepare sign details and specifications for the daylight headlight section signs as specified in the NDOT Standard Plans.
6. Typically, this process takes approximately two to three months from the time of receiving the request to a recommendation.

### NDOT Approval

1. Upon conclusion of the daylight headlight section study, a memo will be prepared, detailing the recommended daylight headlight section installation for the Traffic



Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., request for environmental review/clearance).

2. Approval by NDOT for daylight headlight section does not constitute environmental clearance or right-of-way verification for the installation of the traffic signs.

### **Implementation**

1. The District Staff will initiate the appropriate work orders to install traffic signs and implement recommended daylight headlight section.
2. Once implemented, the District Staff will notify the responsible law enforcement agencies of the presence of a newly designated daylight headlight section.
3. At the request of the local law enforcement agencies, NDOT PIO will initiate a public awareness campaign (to educate the public in the local areas about the potential consequences of non-compliance).
4. The use of soft enforcement or issuing warning only for the first few months is recommended.
5. NDOT Traffic Operations and Traffic Safety Engineering Divisions will evaluate the effectiveness of the installation over the next three years and modify/remove sections as necessary.

## Appendix F: Flashing Beacons

### Purpose

This appendix provides additional details to the traffic operations and safety study procedures for installation of flashing beacons. Flashing beacons provide a supplemental emphasis to alert the driver to specific safety issues. Installation of flashing beacons is widely recognized as a safety enhancement that may be appropriate in addressing a wide range of vehicle, pedestrian, and roadway issues or to supplement other traffic control devices. In more complex situations, a thorough review of operating conditions may be appropriate to ensure implementation of the most effective treatment.

### Background

1. This Appendix supersedes NDOT Policy #00-02, Policy for Flashing Lights.
2. Flashing beacons include warning beacons, livestock/wildlife beacons, intersection control beacons, stop beacons, speed limit beacons with applications as further specified in Chapter 4L, "Flashing Beacons" of the MUTCD (2009 Edition).
  - A. Typical applications of warning (amber in color) beacons include:
    - a. At obstructions in or immediately adjacent to the roadway;
    - b. As supplemental emphasis to warning signs;
    - c. As emphasis for midblock crosswalks;
    - d. In conjunction with a regulatory or warning sign that includes the phrase WHEN FLASHING in its legend to indicate that the regulation is in effect or that the condition is present only at certain times.
  - B. Intersection control beacons are installed as supplemental devices within stop-controlled intersections.
  - C. Stop beacons are installed to provide supplemental emphasis to regulatory signs including STOP, DO NOT ENTER, and WRONG WAY, only.
  - D. SPEED LIMIT beacons are installed to provide supplemental emphasis to speed limit signs, only.
3. Due to concerns associated with the proliferation of flashing beacons to the point they become ubiquitous thus reducing its effectiveness, the use of flashing beacons should be limited to critical safety locations only, regardless of funding mechanism. To that end, implementation shall be based on clearly identified safety issues to be addressed and NDOT determination of the effectiveness of the proposed improvements.

### Process

1. In support of the request for installation of flashing beacons, the requesting party shall provide the NDOT responsible office with the following information:
  - A. Specific vehicle, pedestrian, and roadway operational issues.
  - B. The direct relationship to adverse safety conditions.
  - C. Passive alternatives (i.e., traffic signs or pavement markings) considered and reasons why they would not adequately address the described safety issues.
  - D. How installation of the proposed beacon will directly address the described safety issues.
2. The following process is for livestock and wildlife beacons that may or may not be applicable to other flashing beacon requests.
  - A. The installation of a flashing LED border/beacon should be considered if two of the three conditions below is met (preferably all three):

- a. The study area is a crash hotspot between livestock/wildlife and vehicle.
- b. It is recommended by NDOT Environmental Services Division (Biological and Large Mammal Mitigation Section).
- c. It is recommended by the NDOT District Maintenance staff due to a confirmed increase of vehicle versus animal collisions in the study area.
- B. If only one of the three conditions is met, a static signage should be considered.
- C. The LED border only apply to the livestock signage.
- D. The 1W1C beacons (12-inch round) only apply to the wildlife signage.
- E. If the area is known for public concerns, NDOT Public Information Officer (PIO) will need to be involved for the press release to help inform the public.
- F. Traffic Operations Division's Sign, Striping, and Traffic Control Section will be working in conjunction with the District Staff on the signage design and locations.
  - a. For a roadway that is less than 20 miles, signage should be placed at the begin and end of the roadway, and at the major traffic generated locations/junctions to inform the traveling public.
  - b. For a roadway that is longer than 20 miles, signs can be placed in between the two ends to ensure the zone is covered.
- 3. Any resulting authorization related to installation of a flashing beacon will be at the sole discretion of NDOT.
- 4. Typically, this process takes approximately two to three months from the time of receiving the request to a recommendation.

### **NDOT Approval**

- 1. Upon conclusion of the flashing beacons study, a memo will be prepared, detailing the recommended flashing beacons installation for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., permit application, request for environmental review/clearance).
- 2. Approval by NDOT for flashing beacon does not constitute environmental clearance or right-of-way verification for the installation of the flashing beacons.
- 3. Approval by NDOT for flashing beacon does not obligate NDOT to construct the traffic signs associated with the flashing beacons.

### **Implementation**

- 1. For Development/Permit driven requests, the applicant will be responsible for flashing beacons installation per the conditions of an approved permit. Additionally, if the flashing beacons are not constructed within one year of the date of NDOT approval, all information will be reviewed based on current conditions and may result in denial of the flashing beacons installation.
- 2. For other requests, the District Staff will initiate the appropriate work orders to install the flashing beacons.
- 3. The design and operation of the flashing beacons shall be in compliance with guidelines and specifications as published in the most current version of the MUTCD and Interpretations, Experimentations, Changes, and Interim Approvals approved by the FHWA.

## Appendix G: Pedestrian Safety Zones

### Purpose

This Appendix provides additional details to the traffic operations and safety study procedures for designation of pedestrian safety zones on a State Highway as authorized under SB No. 144 of the 78<sup>th</sup> (2015) Nevada Legislature. A consistent approach to the investigation is imperative.

### Background

SB No. 144 added a new section to NRS 484B.135 specifying the provisions of the bill and amended other sections of NRS 484B to conform thereto. The bill authorizes “certain governing bodies and the Department of Transportation to designate pedestrian safety zones in certain circumstances; providing for enhanced penalties for certain traffic violations in pedestrian safety zones; revising provisions relating to vehicles and pedestrians in certain crosswalks and intersections; prohibiting a driver from making a U-turn or passing another vehicle in a school zone or a school crossing zone in certain circumstances; and providing other matters properly pertaining thereto.”

1. The bill provides, in part:
  - A. Subsection 3 - A governmental entity that designates a pedestrian safety zone shall cause to be erected:
    - a. *A sign located before the beginning of the pedestrian safety zone which provides notice that higher fines may apply in pedestrian safety zones;*
    - b. *A sign to mark the beginning of the pedestrian safety zone; and*
    - c. *A sign to mark the end of the pedestrian safety zone.*
  - B. Subsection 5 - The governing body of a local government or the Department of Transportation may designate a pedestrian safety zone on a Local or State Highway if the governing body or the Department of Transportation, as outlined below:
    - a. *Makes findings as to the necessity and appropriateness of a pedestrian safety zone, including, without limitation, any circumstances on or near a highway that is dangerous for pedestrians; and*
    - b. *Complies with the requirements of subsection 3 and NRS 484A.430 and 484A.440.*
2. The National Highway Traffic Safety Administration (NHTSA) and the Federal Highway Administration (FHWA) developed procedures for defining pedestrian safety zones. The NHTSA zone process provides a systematic method for targeting pedestrian safety improvements in a cost-effective manner. It involves defining relatively small geographic areas, or zones, where a relatively large proportion of the problem occurs. Once defined, a countermeasure program is applied in selected zones, targeting the locations with the biggest crash problems. Information contained within this study process are based on NHTSA’s *Zone Guide for Pedestrian Safety, December 2008* and *NDOT’s Pedestrian Safety Improvement Evaluation Guideline for Uncontrolled Crossings, April 2018*.
  - A. Communities can efficiently concentrate pedestrian safety improvements by carefully selecting where they are applied. To do this, small land areas (or zones) need to be identified where these improvements will reach many pedestrians whose crash risks is to be reduced.
  - B. The aim of zoning is to achieve the highest possible efficiency, which is expressed as the ratio of the percent of the problem addressed to the percent of land area covered. A ratio of 3 to 1 or more is the target and suggests that the zone process will yield a meaningful benefit.

## Process

1. Upon receipt of a request for designation of a pedestrian safety zone on a state highway, at the discretion of the Chief Traffic Operations Engineer, the Traffic Operations Division, as the responsible office, will assist Traffic Safety Engineering Division in the development of a study plan. Technical assistance in development or execution of the study plan may be requested, as needed, from NDOT Traffic Operations Division, Traffic Safety Engineering Division, Traffic Information Division, or other stakeholders.
2. NDOT will be working in collaboration with the local government entities to designate a pedestrian safety zone limits and the signages, in accordance with the law.
3. A pedestrian safety zone shall be established based on documented pedestrian safety issues or concerns. The limits of the zone shall be as short as possible; however, at a minimum shall extend one intersection on all sides of the pedestrian safety issue. Reference Pedestrian Safety Zone figure included.
4. A pedestrian safety zone may be designated as a component of a comprehensive pedestrian safety treatment system for a temporary basis (up to 12 months). Such designation shall comply with all other guidelines contained herein and shall be removed at the conclusion of the event.
5. Defining the pedestrian zone is a 5-step process that involves selecting the crash problem area on which the zone will be based, ensuring availability of the necessary crash data, a heat map that indicates pedestrian crash density of the area, and defining the pedestrian safety zone.
  - A. Identify the crash problem area and select the crash problem that the study intends to address. In order to ensure a reasonably stable measure, a minimum of five years of crash records should be available for establishing pedestrian safety zones. A zone approach is appropriate when **all** of the following conditions exist.
    - a. Crash data needed to define the zone is available.
    - b. Data is sufficient to produce a stable map.
    - c. Pedestrian crashes are densely clustered.
  - B. Map the pedestrian crashes either manually or by computerized mapping system like geographic information system (GIS). A large map of the area is required, and entry of any data subsets of interest must be planned prior to the start of the mapping. For example, if crash types are of interest, some method such as color coding would be needed to differentiate different crash types of interest. Separate maps might be needed to display different subsets of data.
  - C. The pedestrian crash problem area will be defined by the map which shows spots that indicate a high density of pedestrian crashes. If clustering of pedestrian crashes is not apparent and/or the map shows crashes randomly spread, the area may not be deemed a pedestrian safety zone.
    - a. A circular zone is a manageable area in which to concentrate program activities due to most pedestrian crashes occurring within one-mile radius of the victim's work or home.
    - b. A linear zone should also be considered since most crash reduction programs include activities that can be applied to road segments. Examine maps for high frequencies of pedestrian crashes that occur along a single segment where multiple pedestrian crashes occur. Pedestrian safety zones can be adjusted by the number of crashes and/or severity of injuries in a given location.
    - c. The defined circular and linear zones should be examined to determine if efficiency might be improved if they were merged or their shape changed. It may be wise to reduce the size of a circular zone or change its shape if most of the events within it cluster near the center.



- D. Calculate efficiency ratio of pedestrian safety zone. The percentage of both crashes and land area covered should be calculated in order to determine program coverage efficiency. If the ratio of the percent of the problem area addressed to the percent of the land area covered in the zone is much less than three, the zone may need to be reexamined to try to improve efficiency (see example below).
  - E. Identify pedestrian generators; where pedestrians originate from, and where pedestrians travel to, and select final zone.
6. A supporting letter by the requestor, local agencies, or law enforcement agencies should be submitted for consideration.
  7. Any resulting authorization related to designation of a pedestrian safety zone on a state highway will be at the sole discretion of NDOT.
  8. Typically, this process takes approximately three to four months for a pedestrian safety zone report.

### **NDOT Approval**

1. Upon conclusion of the pedestrian safety zone study, a memo will be prepared, detailing the recommended pedestrian safety zone installation for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., permit application, request for environmental review/clearance).
2. Approval by NDOT does not constitute environmental clearance or right-of-way verification for the installation of the traffic signs.
3. Approval by NDOT does not obligate NDOT to construct a pedestrian safety zone.

### **Implementation**

1. For Development/Permit driven requests, the applicant will be responsible for the pedestrian safety zone installation per the conditions of an approved permit. Additionally, if the pedestrian safety zone is not constructed within one year of the date of NDOT approval, all information will be reviewed based on current conditions and may result in denial of the pedestrian safety zone installation.
2. For other requests, the District Staff will initiate the appropriate work orders to install pedestrian safety zone signs and implement recommended pedestrian safety zones.
3. NDOT Traffic Operations Division will prepare sign details and specifications for the signs specified in the law. Refer to Ped Safety Zone Signs figure included herein.
4. Once implemented, the District Staff will notify the responsible law enforcement agencies for their awareness of a newly designated pedestrian safety zone.
5. NDOT Traffic Operations and Safety Engineering Divisions will coordinate with stakeholders to monitor crash reduction of pedestrian safety zones and adjust/remove zones as necessary.

## **Guidelines for the Development of a Pedestrian Safety Zone**

1. Identify the crash problem
  - A. Collect the crash data needed to define potential zones
  - B. Data analysis
  - C. Cluster crashes on density map
2. Create large density map to determine hot spot locations
3. Determine high density points (hot spot locations) on density map and calculate efficiency ratios (See attached sheet on further clarification on how to calculate efficiency)
4. The defined hot spot locations are furthered analyzed
  - A. Identify pedestrian generators
  - B. Identify high density of residential housing
  - C. Identify other considerations that could contribute to pedestrian traffic in the proposed area
5. Determine location of pedestrian safety zone
6. NDOT approval
  - A. Identify the next steps required of the requesting party
7. Implementation
  - B. Pedestrian safety zone must be implemented within one year of date of NDOT approval or issuance of a permit (if applicable)
  - C. Requesting party is responsible for installation
    - a. For other requests, the District Staff will initiate the appropriate work orders
    - b. NDOT Traffic Operations Division will prepare sign details and specifications for the signs specified in the law

## How to Calculate Efficiency Ratio of Pedestrian Safety Zone

1. Begin with a circle with a one-mile radius on the density map that was created.
2. Within the circle with the one-mile radius, look for clusters of pedestrians involved crashes (minimum of 10 crashes), which will become the Refined Focused Zone.
3. Any area that has 10 or more pedestrian crashes are then circled as shown in Figure 1 and will be a Refined Focused Zone. For simplicity, this document will only focus on one Refined Focused Zone. If multiple Refined Focused Zones are present, an efficiency calculation will need to be done for each individual zone.
4. Calculate the frequency of the pedestrian crashes that occur within the Refined Focused Zone(s), i.e., the number of pedestrian crashes. A more specific focus target can also be used.

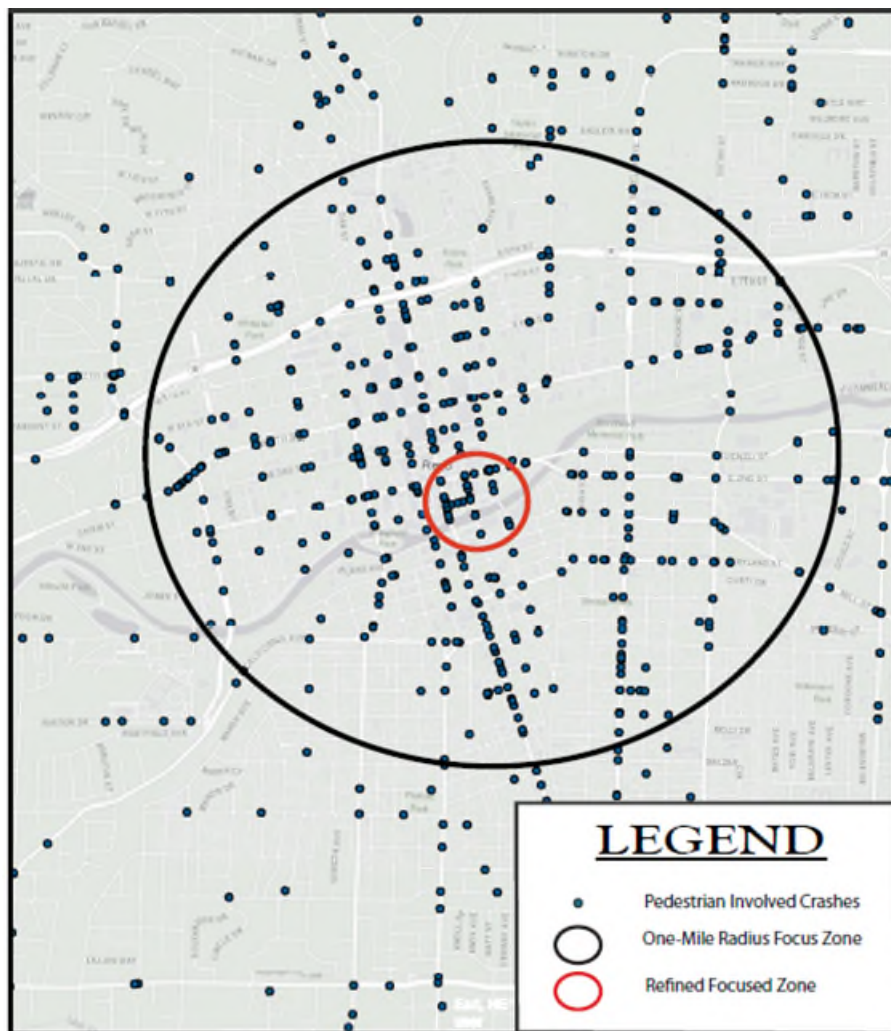


Figure 1 Sample Map Showing Focus Zones for Determining Pedestrian Safety Zones

- Calculate the efficiency ratio.

$$\text{Efficiency Ratio} = \frac{\% \text{ crashes of interest area}}{\% \text{ area those crashes occur over}}$$

- Efficiency ratio is calculated by taking the area of the One-Mile Radius Focused Zone and the area of the Refined Focused Area. This will give you a percentage of how much land area is encompassed by the Refined Focused Area as opposed to the One-Mile Radius Focus Zone. From Fig. 1, it was determined that the Refined Focus Zone had a 0.15-mile radius. A sample calculation is shown below:

$$\begin{aligned} \text{One Mile Radius Focused Zone} &= \pi r^2 \\ \text{One Mile Radius Focused Zone} &= \pi(1.0 \text{ mile})^2 \\ \text{One Mile Radius Focused Zone} &= 3.1416 \text{ mi}^2 \end{aligned}$$

$$\begin{aligned} \text{Refined Focused Zone} &= \pi r^2 \\ \text{Refined Focused Zone} &= \pi(0.15 \text{ mile})^2 \\ \text{Refined Focused Zone} &= 0.0707 \text{ mi}^2 \end{aligned}$$

$$\frac{0.0707 \text{ mi}^2}{3.1416 \text{ mi}^2} = 2.25\% \text{ of the area of the One Mile Radius Focus Zone is the Refined Focused Zone Area}$$

- After calculating the percentage of the Refined Focused Zone compared to the One-Mile Radius Focused Zone, calculate the percentage of pedestrian crashes in the refined zone as compared to the One Mile Radius Focused Zone. The Refined Focus Zone had 27 pedestrian crashes and the One-Mile Focus Zone had 359 pedestrian crashes. A sample calculation is provided below:

$$\frac{\text{Number of Pedestrian Involved Crashes in Refined Focused Zone}}{\text{Number of Pedestrian Crashes in One Mile Radius Focused Zone}}$$

$$\frac{27 \text{ pedestrian crashes}}{359 \text{ pedestrian crashes}} = 7.5\% \text{ of pedestrian crashes occur in the Refined Focused Zone}$$

- The final step of calculating the efficiency ratio is to relate the percentage of crashes that occur in the Refined Focus Zone determined in Step 7 and the percentage of land area that the Refined Focus Zone covers compared to the One Mile Radius Focus Zone determined in Step 6. A sample calculation is provided below:



$$\frac{7.5\% \text{ of pedestiran crashes are in the Refined Focus Zone}}{2.25\% \text{ area those crashes occur over}} = 3.33 \text{ to 1 Ratio}$$

- The efficiency ratio of 3.33 to 1 meets the minimum requirements and therefore the Refined Focus Zone is indicative of the application of a Pedestrian Safety Zone.

STATE	PROJECT NO.	COUNTY	SHEET NO.
NEVADA			101

Note: Local jurisdictions will be responsible for signage within their boundaries per the NRS 484B.135.

### PEDESTRIAN SAFETY ZONE (VARIES)

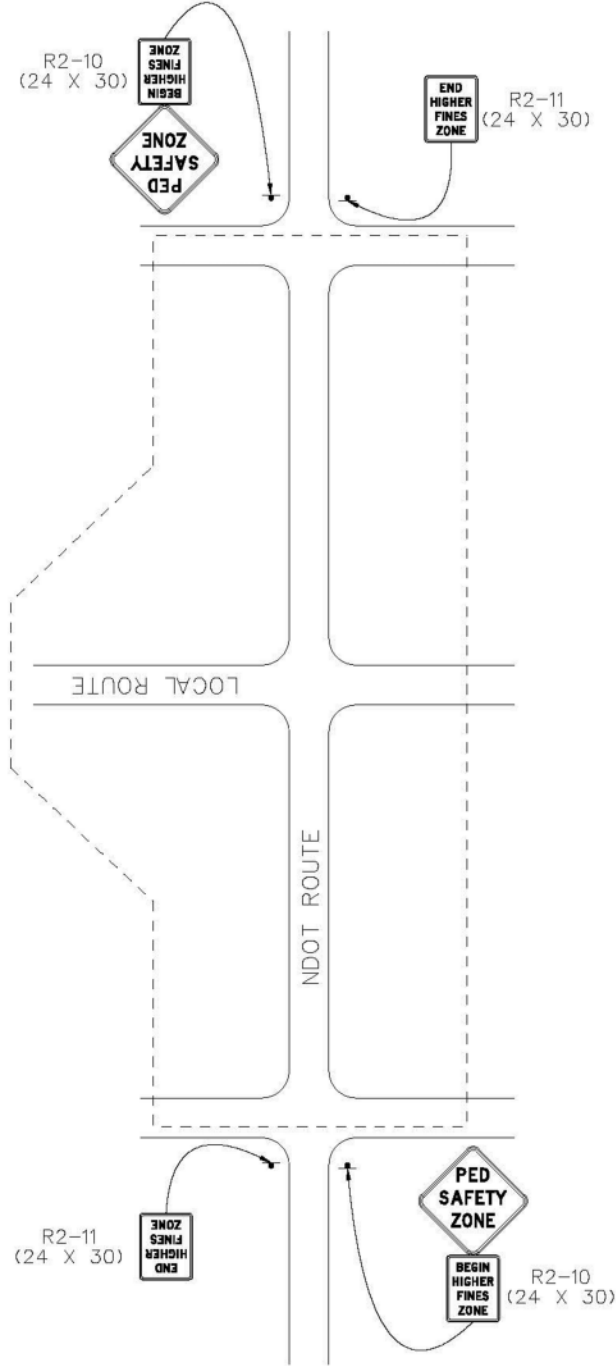

36.0" across with 3.8" Radius, 0.9" Border, 0.6" Indent,  
 Black on, Bright yellow green,  
 "PED", D;  
 "SAFETY", D;  
 "ZONE", D 80% spacing.

STATE OF NEVADA  
 DEPARTMENT OF TRANSPORTATION  
 PEDESTRIAN SAFETY ZONE  
 TYPICAL

## Appendix H: Pedestrian Safety Improvement Evaluation

### Purpose

This Appendix provides additional details to the traffic operations and safety study procedures for installation of crosswalks at uncontrolled locations and installation of supplemental safety treatment enhancements. This Appendix is not applicable to traffic signals or school crossings. They are to be discussed in their own appendices. The purpose of the Pedestrian Safety Improvement evaluation is to select crossing locations that will benefit from pedestrian safety improvements emphasizing the importance of engineering judgement, allowing design flexibility, and providing support for the decision-making process. The user is referred to the intersection control evaluation study process for determining applicability of a traffic signal installation to address pedestrian issues. A consistent approach to the investigation is imperative.

### Background

1. Pedestrian safety is arguably one of the most critical life-safety issues that a transportation agency may address. Each potential crossing location is unique in terms of traffic, roadway, roadside, adjacent development, and other environmental conditions. Because of this, it is imperative that those elements be analyzed systematically for each location in the development of appropriate treatments. In some cases, an effective treatment may require addressing other elements of the roadway environment with traffic calming or complete street features in support of specific treatments at the crossing location.
2. Governmental agencies are often struggling to address ever growing demands for services with limited or, in some cases, diminishing resources. Under these conditions, there may be a temptation to place undue reliance on an available tool at the expense of careful consideration and analysis of pertinent and unique characteristics of the subject location.
3. The user should approach this process as a guide to apply a uniform and consistent analysis of those location attributes that are significant to addressing the pedestrian safety issue.
4. This study process is applying the FHWA's Proven Safety Countermeasures Initiative (PSCi) <https://safety.fhwa.dot.gov/provencountermeasures/> to assist in the assessment of uncontrolled locations and selection of appropriate crosswalk treatments.

### Process

1. If the request is only for the RRFB installation:
  - A. Has the requestor considered other Pedestrian Crossing Treatments listed in Section 4.D below? If yes, provide the data and information to Traffic Operations Division and go to Section B below. If no, go to Section C.
  - B. Submit a pedestrian and bike counts request to the Traffic Information Division and skip to Section 6 below. The pedestrian safety improvement evaluation is not required.
  - C. Traffic Operations Division will take a lead in setting up a meeting with the requestor to discuss on how an RRFB was justified/selected and should the Pedestrian Safety Improvement Evaluation study be considered?



- D. At a discretion of the Chief Traffic Operations Engineer, if the RRFB is justified, go to Section B above. If the Pedestrian Safety Improvement Evaluation study is considered, continue to Section 2 below.
2. If not identified by other studies, upon receipt of a request for a pedestrian safety improvement at an existing or proposed pedestrian crossing at an uncontrolled location, the Traffic Operations Division, as the responsible office, will develop a study plan based on the PSCi. Technical assistance in development or execution of the study plan may be requested, as needed from Traffic Safety Engineering Division, District Staff, Traffic Information Division, or other stakeholders.
  3. The requestor shall provide a “*Statement of Need*” that presents facts and evidence to support the proposed evaluation in the Pedestrian Safety Improvement Evaluation form.
  4. The evaluation process consists of five parts: A) Identify and Field Review, B) Collect Data, C) Field Visit and Determination, D) Pedestrian Crossing Treatments, and E) Selection.
    - A. Identify pedestrian safety improvement locations based on pedestrian crash data and communication with stakeholders to gain a better understanding of pedestrian behaviors. Important steps to identify pedestrian safety improvement locations include:
      - a. Collaboration with other entities.
      - b. Review pedestrian crash data.
      - c. Review Road Safety Assessments (RSA's), corridor studies, and safety management plans etc.
      - d. Create a pedestrian safety improvement location list.
      - e. Conduct a preliminary field review (PEDESTRIAN SAFETY IMPROVEMENT FIELD INVENTORY FORM that can be found in the Forms Section), as necessary, to become familiar with the existing geometry, traffic control devices and land use at the subject crosswalk site. Location of nearby schools is especially critical to this process, although this process does not apply to school crossings. A nighttime review of the site should also be conducted.
    - B. Data should be collected prior to any decision on treatments for the subject crosswalk. The following key focus points should be considered:
      - a. Pedestrian Crash Data – review crash data from NDOT Traffic Safety Engineering Division. Consider a crash data request for the subject crosswalk location including appropriate approach distances to the crosswalk as indicated by operational features, i.e., intersections, driveways, pedestrian/bicycle trails, etc.
      - b. Pedestrian Volume – conduct a minimum of four (4) hours, two (2) hours in the AM and two (2) hours in the PM peaks, pedestrian counts. An additional two (2) hours between 11 am to 1 pm could be requested if the noon/lunch pedestrian generator is deemed significant.
      - c. Vehicular Volume – use current Average Annual Daily Traffic (AADT) if available or conduct vehicle counts.
      - d. Posted Speed Limit – a speed study as described in Appendix A may be needed if it is determined that vehicle speeds are not in compliance with the posted speed limit.
      - e. Roadway Geometry – record the roadway width, total number of lanes that a pedestrian must cross including through travel lanes, two-way left turn (TWLTL) lane for mid- block crosswalk locations, paved shoulders, and right turn and left turn lanes at intersection crosswalk locations.
      - f. Specific vehicle, pedestrian, and roadway operational issues.

- g. Median – record existence of any median including raised median, painted median, or unpaved median.
  - h. Street Lighting – presence of lighting, number of luminaires and layout of street lighting at the subject crosswalk location.
  - i. Nearest Traffic Signal Control – if less than 600 feet, record distance to nearest traffic signal control for mid-block crosswalk locations.
  - j. Traffic Control Devices for Subject Crosswalk – record all existing signing, pavement markings, and other traffic control devices relative to the subject crosswalk. Record existing flashing beacons within or adjacent to the corridor.
  - k. Sight Distance – determine if adequate sight distance exists for pedestrians and drivers.
  - l. Alternative Crosswalk Sites – record any alternative crosswalk sites considered and the reasoning for not choosing those sites.
  - m. Site Type – Residential, commercial, or industrial.
  - n. Site Conditions – Distance from intersection, nearest bus stop locations, on-street parking, and roadway functional classification. Are there sidewalks and ramps? Is there sidewalk leading to the bus stop? Is there a multi-use path or bike lane? Is it in a school zone? Are sidewalk and ramps ADA compliant?
  - o. Passive alternatives (i.e., traffic signs or pavement markings) considered and reasons why they would not adequately address the described safety issues.
- C. Field Review and Determination.

A field review team can collect the data that was not available prior to the field visit. The field review team is also able to get a better understanding of what possible crossing treatments can and cannot work for each location. The Uncontrolled Crosswalk Decision Matrix is available to aid in the decision process to determine the need for the subject crosswalk and the potential treatments to be considered. The matrix utilizes AADT, speed limit (mph), and number of lanes to help suggest possible crossing treatment types when implementing pedestrian safety. The information contained in the Uncontrolled Crosswalk Decision Matrix is not a substitute for engineering judgment. Many other factors beyond those mentioned in this process description may need to be considered. The following guidelines should be considered when using the Uncontrolled Crosswalk Decision Matrix:

- a. The Uncontrolled Crosswalk Decision Matrix includes intersection and midblock locations with no traffic signals or stop signs on the approach to the crossing location.
- b. A two-way left turn (TWLTL) lane is considered a travel lane and not considered to serve as a median for purposes of this process.
- c. Additional safety design features and/or traffic control devices must be included in any plans for proposed crosswalk locations that could present an increased safety risk to pedestrians, such as where there is inadequate sight distance, complex or confusing designs, a substantial volume of heavy trucks, or other high-risk elements.
- d. Adding crosswalks alone will not make crossings safer, nor will they necessarily result in more vehicles stopping for pedestrians.
- e. Based on the evaluation of location traffic data and the matrix guidelines, other pedestrian facility enhancements (e.g., raised median, traffic signal, pedestrian hybrid beacon, flashing beacons, roadway narrowing, enhanced overhead lighting, traffic-calming measures, curb extensions, etc.), may be needed to improve the safety of the crossing.
- f. Where the speed limit exceeds 35 mph, marked crosswalks alone should not be used at unsignalized locations.

- g. All new and modified existing crosswalk locations must be compliant with the requirements of the Americans with Disabilities Act.
  - h. In consideration of concerns associated with the proliferation of flashing beacons in the roadway environment to the point they become ubiquitous thus reducing their effectiveness, flashing beacons and RRFB's should be limited to locations with critical safety concerns related to the need for supplemental emphasis to alert the driver to specific safety issues regardless of funding mechanism.
  - i. Where multiple existing crosswalks are in close proximity of each other and one of the PHB, RRFB, or pedestrian signal treatments is warranted at this location, consolidating those crosswalks into a single preferred location must be considered.
- D. Pedestrian Crossing Treatments  
 Crossing treatment types listed in the matrix are pedestrian safety countermeasures. Refer to PSCi, for a more detailed description of each treatment:
- a. Crosswalk Visibility Enhancements.
  - b. Median and Pedestrian Refuge Islands.
  - c. Leading Pedestrian Interval.
  - d. Enhanced Crosswalk Lighting.
  - e. Rectangular Rapid Flashing Beacons (RRFB)\*.
  - f. Overhead (RRFB)\*.
  - g. Road Diets (Roadway Reconfiguration).
  - h. Walkways.
  - i. Pedestrian Hybrid Beacons (PHB)\*.
- E. Selection of pedestrian safety improvements and locations where projects can be developed is determined once all the existing condition data is collected and analyzed. NDOT Traffic Safety Engineering developed a matrix point system (PEDESTRIAN SAFETY WEIGHTED VALUES FORM that can be found in the Forms Section) to aid in the selection process, allowing for a justifiable way to determine which locations should be addressed first. The potential pedestrian safety improvement project selection matrix is based on demographics and pedestrian high, medium, and low generators. This allows for all pedestrian safety improvement locations to be weighted in a fair and equal manner.
5. Documentation - Summarize the results of Pedestrian Safety Improvement Evaluation and document the process for each crosswalk location that is evaluated. Documentation should include all dates/times for field reviews, collected data and a written record of all decisions made and actions taken or not taken.
  6. A supporting letter by the requestor, local agencies, or law enforcement agencies should be submitted for consideration.
  7. Any resulting authorization related to implementation of crosswalk and safety treatments will be at the sole discretion of NDOT.
  8. Typically, this process takes approximately four to six months from the time of receiving the request to a recommendation.
  9. If the request is only for the RRFB installation, this process will typically take approximately two to three months from the time of receiving the request to a recommendation.

\* See Uncontrolled Crosswalk Decision Matrix, Crossing Treatment Types 3.

UNCONTROLLED CROSSWALK DECISION MATRIX												
(Treatments to be applied only if evaluations of conditions indicate that the treatment will provide a significant safety benefit)												
Roadway Type (Number of Travel Lanes and Median Type)	Vehicle ADT			Vehicle ADT			Vehicle ADT			Vehicle ADT >15,000		
	≤30 mph	35 mph	40 mph	≤30 mph	35 mph	40 mph	≤30 mph	35 mph	40 mph	≤30 mph	35 mph	40 mph
Posted Speed Limit												
Two lanes	C/1	C/1	P/2	C/1	C/1	P/2	P/2	P/2	P/3	P/2	P/3	P/3
Three lanes	C/1	C/1	P/2	C/1	P/2	P/2	P/2	P/2	P/3	P/2	P/3	P/3
Multilane (four or more lanes with raised median)	C/1	C/2	P/2	C/2	P/2	P/3	P/2	P/2	P/3	P/3	P/3	P/3
Multilane (four or more lanes without raised median)	C/1	P/2	P/3	P/2	P/2	P/3	P/2	P/3	P/3	P/3	P/3	P/3

**C - Candidate sites for marked crosswalks.** An engineering study is required to determine whether a marked crosswalk will provide a significant safety benefit. A site review may be sufficient at some locations, while a more in-depth study of vehicle speeds, sight distance, vehicle mix, and other factors may be needed at other sites. See Crossing Treatment Type Number 1.

**P - Possible increase in pedestrian crash risk if crosswalks alone are added without other pedestrian facility enhancements.** If the evaluation determines that a crosswalk would provide a significant safety benefit, then crosswalk locations should be enhanced with other pedestrian crossing improvements such as those shown in Crossing Treatment Types Number 2 or 3.

**Minimum crosswalk treatments at uncontrolled locations should follow the requirements of the Manual on Uniform Traffic Control Devices (most current version).**

**Crossing Treatment Types:**

- 1 - High visibility crosswalk striping is recommended, and consideration of additional treatments such as a pedestrian refuge island and/or advanced yield lines and street lighting.
- 2 - In addition to 1 above, crossing treatments such as overhead pedestrian crossing signs with flashing beacons, parking removal between crosswalk, two-stage crossing, and pedestrian fencing should be considered.

- In addition to 1 and 2 above, crossing treatments such as Pedestrian Hybrid Beacon (PHB), pedestrian activated Rectangular Rapid Flashing Beacon (RRFB) side and/or overhead mounted with advance pedestrian activated RRFBs, and pedestrian signal should be considered if a minimum utilization of 20\* pedestrians per hour crossing the major street can be verified. The requirements for installing an RRFB or a PHB are to meet ADA requirements and have a maintenance agreement with the Districts or the Local Agencies. Installation of traffic signals cannot be considered unless traffic conditions meet warrant criteria specified in the Manual on Uniform Traffic Control Devices.

\* Guidance from the MUTCD (2009 Edition) Chapter 4F. If 20 pedestrians per hour is not met, other criteria may be reviewed and evaluated for consideration.

## NDOT Approval

10. Upon conclusion of the pedestrian safety improvement evaluation, a memo will be prepared, detailing the recommended pedestrian safety improvements for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g., permit application, request for environmental review/clearance).
11. Approval by NDOT does not constitute environmental clearance or right-of-way verification for the installation of pedestrian safety improvements.
12. Approval by NDOT does not obligate NDOT to construct the pedestrian safety improvements, and NDOT assumes no liability should the improvements not be installed.
13. Upon receiving the pedestrian and bike counts for the RRFB installation justification, a memo will be prepared by the Traffic Operations Chief detailing the recommendations. If the minimum pedestrian and bike counts are lower than the threshold (see Uncontrolled Crosswalk Decision Matrix, Crossing Treatment Type 3) set forth in the MUTCD (2009 Edition) Chapter 4F, and the crash data are at or below the statewide average, other criteria may be reviewed and evaluated for consideration as documented in the kickoff meeting minutes and/or the scope of the study as applicable.

## Implementation

1. If the recommended pedestrian safety improvements are approved by NDOT, the Traffic Operations Division shall distribute notification to stakeholders. Implementation may be accomplished in a variety of ways, i.e., included as part of an upcoming roadway project, a standalone project, or a safety project pending funding availability.
2. For requests that are Development/Permit driven, the requesting party will be responsible for the crosswalk and safety treatments installation and for submitting a new permit application if the improvement is not constructed within one year of the date of NDOT approval. All information will be reviewed based on conditions existing at the time of review and may result in denial of the permit.
3. The design and implementation of crosswalk and safety treatments shall be in compliance with guidelines and specifications published in the most current version of the MUTCD and Interpretations, Experimentations, Changes, and Interim Approvals approved by the FHWA, as well as applicable AASHTO guidelines, i.e., Green Book, Bicycle Design Guide, etc.

## Appendix I. School Zones and School Crossing Zones Evaluations

### Purpose

This appendix provides additional details to the traffic operations and safety study procedures for evaluating the school zones and school crossing zones. The purpose of identifying a school zone and a school crossing zone is to reduce the speed limits appropriately during the school drop off and pickup times. A consistent approach to the investigation is imperative.

### Background

1. Identify a school zone and a school crossing zone shall comply with the NRS 484B.363, NRS 484B.060, and NRS 484B.063, that states, in part:
  - A. NRS 484B.363, Subsection 1 – A person shall not drive a motor vehicle at a speed in excess of 15 miles per hour in an area designated as a school zone.
  - B. NRS 484B.363, Subsection 2 – A person shall not drive a motor vehicle at a speed in excess of 25 miles per hour in an area designated as a school crossing zone.
  - C. NRS 484B.363, Subsection 5 – The governing body of a local government or the Department of Transportation shall designate school zones and school crossing zones. An area must not be designated as a school zone if imposing a speed limit of 15 miles per hour would be unsafe because of higher speed limits in adjoining areas.
  - D. NRS 484B.060 – “School crossing zone” means those sections of streets not adjacent to school property that pupils cross while following a designated walking route to school.
  - E. NRS 484B.063 – “School zone” means those sections of streets which are adjacent to school property.
2. Installation of speed reduction signs within a school zone and a school crossing zone shall comply with MUTCD (2009 Edition), Section 2B-13 and Chapter 7B.

### Process

1. Upon receipt of a request for a school zone and a school crossing zone evaluations on a state highway, the Traffic Operations Division as the responsible office, will develop a study plan. Technical assistance in development or execution of the study plan may be requested, as needed, from Traffic Safety Engineering Division, Traffic Information Division, District Staff, or other stakeholders.
2. NDOT will be working in collaboration with the local government entities to designate a school zone and a school crossing zone limits and signages, in accordance with the law.
3. With respect to each school zone and school crossing zone in a school district, the superintendent of the school district or his or her designee, in conjunction with the NDOT and the governing body of the local government that designated the school zone or school crossing zone and after consulting with the principal of the school and the law enforcement agency that is responsible for enforcing the speed limit in the zone, shall determine the times when the speed limit is in effect.
4. A supporting letter by the requestor, local agencies, or law enforcement agencies should be submitted for consideration.
5. A Pedestrian Safety Zone may be studied if a segment of the school crossing zones is considered a high crash location related to pedestrian. Refer to Appendix E of this study process.



6. Typically, this process takes approximately three to four months from time of receiving the request to a recommendation. Longer time may be required if a traffic analysis is needed in the evaluation.

### **NDOT Approval**

1. Upon conclusion of the school zone and school crossing zone evaluation, a memo will be prepared, detailing the recommended school zone and school crossing zone installation for the Traffic Operations Chief's review and approval. The approval will identify next steps required of the requesting party, if applicable (e.g. permit application, request for environmental review/clearance, and interlocal agreement on operations and maintenance (O&M) between the Department and the School District).
2. Approval for installation of a school zone and a school crossing zone signs does not constitute environmental clearance or right-of-way verification for the signs.
3. Approval by NDOT for a school zone and school crossing zone signs installation does not obligate NDOT to construct the signs.

### **Implementation**

1. Upon approval, the requesting party will be notified. For requests that will be installed by others, a new permit application will need to be submitted to NDOT for approval.
2. For NDOT install, the District Staff will initiate the interlocal agreement (O&M) and appropriate work orders, in conjunction with Traffic Operations Division's Signs, Striping, and Traffic Control Section, for the school zone and school crossing zone signs installation.

## FORMS













# Daylight Headlight Section Study Request Form

Traffic Operations Division: 1263 South Stewart Street, Carson City, 89712 Phone: 775-888-7080 Fax: 775-888-7090

---

Date Requested _____	Applicant _____
Applicant Telephone _____	Applicant Email _____
District _____	District Contact _____
Contact Telephone _____	Contact Email _____

---

Describe the Location \_\_\_\_\_

Route \_\_\_\_\_ Mile Post \_\_\_\_\_

County \_\_\_\_\_

Describe the request or Statement of Need \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

---

**For Traffic Operations Use Only:**

Date Requested to Traffic Safety Engineering Division \_\_\_\_\_

Supporting Documents \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



# Flashing Beacon Request Form

Traffic Operations Division: 1263 South Stewart Street, Carson City, 89712 Phone: 775-888-7080 Fax: 775-888-7090

Date Requested \_\_\_\_\_ Applicant \_\_\_\_\_

Applicant Telephone \_\_\_\_\_ Applicant Email \_\_\_\_\_

District \_\_\_\_\_ District Contact \_\_\_\_\_

Contact Telephone \_\_\_\_\_ Contact Email \_\_\_\_\_

---

Describe the Location \_\_\_\_\_

Route \_\_\_\_\_ Mile Post \_\_\_\_\_

City \_\_\_\_\_ County \_\_\_\_\_

Describe the request or Statement of Need \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

How will the proposed beacon address the described safety issue \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

---

## **For Traffic Operations Use Only:**

Supporting Documents \_\_\_\_\_

Livestock and Wildlife Beacons Request \_\_\_\_\_ Flashing Beacon Request \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_





# School Zone / Crossing Study Request Form

Traffic Operations Division: 1263 South Stewart Street, Carson City, 89712 Phone: 775-888-7080 Fax: 775-888-7090

---

Date Requested_____	Applicant_____
Applicant Telephone_____	Applicant Email_____
District_____	District Contact_____
Contact Telephone_____	Contact Email_____

---

Location and Description\_\_\_\_\_

Route_____	Mile Post_____
City_____	County_____

Describe the request or Statement of Need\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

---

**For Traffic Operations Use Only:**

Date Requested to Traffic Information Division\_\_\_\_\_

Date Requested to Traffic Safety Engineering Division\_\_\_\_\_

Supporting Documents\_\_\_\_\_

Notes:\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**PEDESTRIAN SAFETY IMPROVEMENT FIELD INVENTORY FORM**

**FILL OUT THE SECTION BELOW BEFORE FIELD INVENTORY**

Location: \_\_\_\_\_

City: \_\_\_\_\_ County: \_\_\_\_\_

Speed Limit: \_\_\_\_\_

Urban

Rural

AADT major\*: \_\_\_\_\_

AADT major\*: \_\_\_\_\_

\*Use the NDOT Traffic Records Information Application (TRINA) to determine AADT.

**FILL OUT THE SECTION BELOW DURING/AFTER FIELD INVENTORY**

**Existing Traffic Control:**

2-way stop

4-way stop

Signalized intersection

Non-signalized intersection

Roundabout

Other: \_\_\_\_\_

**Existing Crossing Condition:**

Midblock crossing

Intersection crossing

Curb extensions

Pedestrian refuge

**Existing Striping:**

Marked crosswalk

Unmarked crosswalk

Crosswalk striping condition: Poor / Fair / Good

Number of crosswalk per intersection: \_\_\_\_\_

**Existing Crossing Signal & Lighting:**

Pedestrian signage

Advance signage

Crosswalk lighting

RRFB (Rectangular Rapid Flashing Beacon)

PHB (Pedestrian Hybrid Beacon)

Pedestrian signal

**Existing Roadway Condition (Within 1/2 Miles of the Crossing):**

Bus only lane

Bike lane

Shared bus-bike lane

School zone

Bus stop

On street parking

Sight distance issue

Street lighting

Other: \_\_\_\_\_


Existing sidewalk: Yes / No

One side of the roadway

Non-ADA compliant sidewalk\*

Non-ADA compliant ramp\*

Directional ramp



Diagonal ramp



2-lane undivided

2-lane with center left turn lane

2-lane with raised median

4-lane undivided

4-lane with center left turn lane

4-lane with raised median

6-lane with center left turn lane

6-lane with raised median

Roadway width: \_\_\_\_\_

\*Use the ADA GIS Feature Inventory to determine if sidewalk and ramps are Non-ADA compliant.

<https://ndot.maps.arcgis.com/home/webmap/viewer.html?webmap=0202ae8a996a4715b9da2fe1b2e2548e>

**PEDESTRIAN SAFETY WEIGHTED VALUES FORM**

<b>Land Use Category</b>	<b>Sub-Category</b>	<b>Examples/Notes</b>	<b>Weight 1/8 Mile</b>	<b>Weight 1/4 Mile</b>	<b>Weight 1/2 Mile</b>
High Generator	University or College		15	10	5
	Major Generator	Convention Center, Casino	15	10	5
	Multi-family Living	Condominiums, Apartments, Mobile Home Park	10	5	3
Medium Generator	School		5	3	1
	Major Retail	Grocery Store, Convenient Store, Banks, etc.	5	3	1
	Bars		5	3	1
	Hotels	Motels	5	3	1
	Food Services	Restaurants, Fast Food, etc.	5	3	1
	Hospital	Clinics	5	3	1
	Bus Stop		5	3	1
	Senior Living	Hospice Care	5	3	1
	Community Services	Community Centers, Libraries, Post Offices, Social Services, Churches, etc.	5	3	1
Low Generator	Minor Retail	General Retail, Offices, etc.	3	1	0
	Park		3	1	0
	Trials	Bike Path, Multi-Use	3	1	0
Street Classification	Local			1	
	Collector			3	
	Minor Arterial			4	
	Principal Arterial			5	
Speed Limit	≤ 30			1	
	35+			3	
	40+			4	
	≥ 45			5	
Sidewalk Status	Missing			20	
	Narrow	< 4 feet		10	
	Standard	4 - 6 feet		0	
	Wide	> 6 feet		-10	
Parking	Yes On-street parking			0	
	No On-street parking			5	
Curb	Yes			0	
	No			2	
Road Width	0 - 24 feet			0	
	24 - 36 feet			2	
	36 - 48 feet			4	
	48 - 60 feet			6	
	61+ feet			10	
Distance Between Major Intersections	0 - 500 feet			0	
	500 - 1000 feet			2	
	1000 - 2000 feet			4	
	2000+ feet			5	
Stop Control	Roundabout			-4	
	Signal			-3	
	4-way Stop Sign			-2	
	2-way Stop Sign			-1	